

Features:


- 2 ~ 24 circuits available
- Material: UL 94V-2
- Positive housing locks
- Recommended PCB thickness: .07"(1.78mm) Max.

Specifications:

- Voltage rating: 600V AC, DC (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature range)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
02		5.4	14	25.2	30.6
04	4.2	9.6	16	29.4	34.8
06	8.4	13.8	18	33.6	39.0
08	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

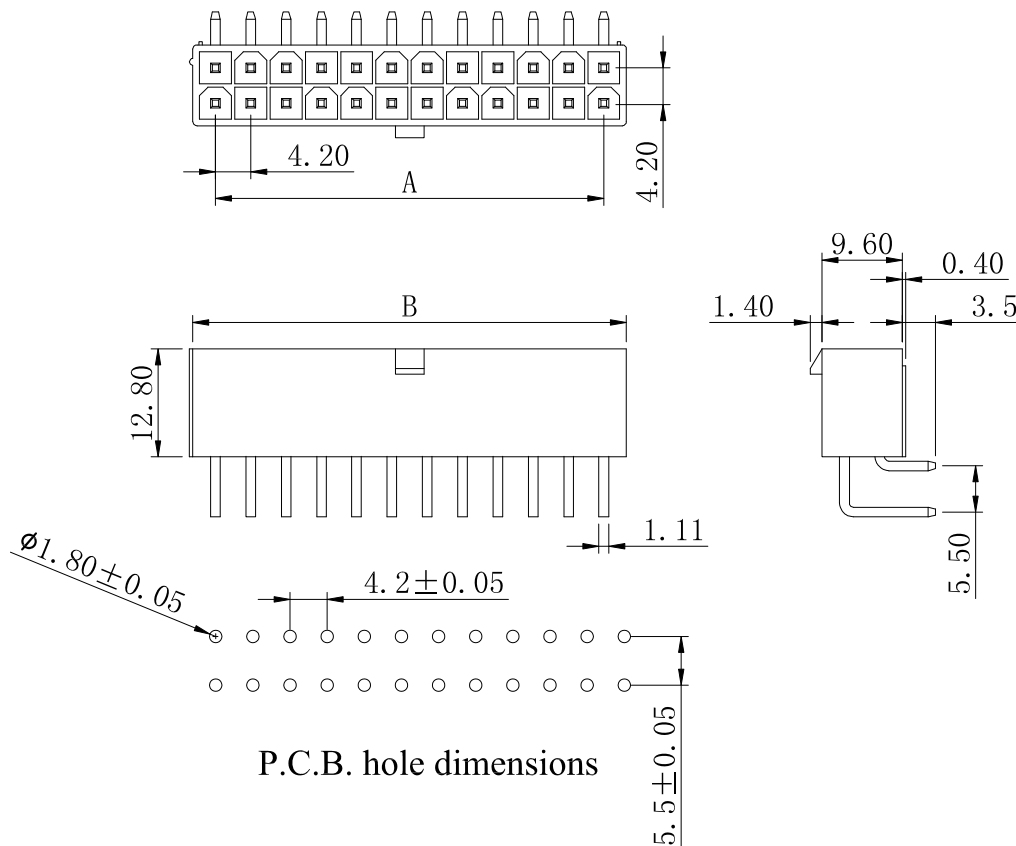

P.C.B. hole dimensions

Current rating & wire size:

Wire Size AWG	Circuits			
	2	4 ~ 6	8 ~ 10	12 ~ 24
#18	9A	8A	7A	6A
#20	7A	6A	5A	5A
#22	5A	4A	4A	4A
#24	4A	3A	3A	3A



DESCRIPTION(内容):

**.165" (4.2mm) MINI FIT
Right Angle Header(RoHS)**

PART NO:
(料 號) **CR-W421-XX-CF1017**

DWG NO(圖號): **42001WR-N**

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.40
.XX ±0.25

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

2014年8月料號P數編碼統一兩碼

修正 B 尺寸標示位置

DATE

2013.11.12

2015.09.15

2016.07.28