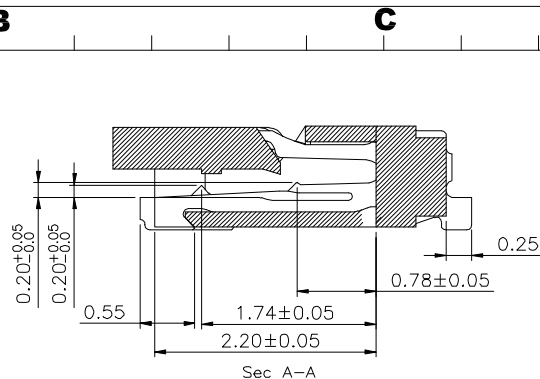
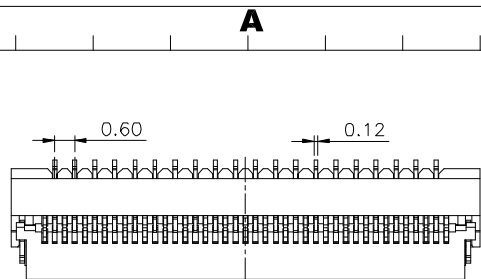


PART NO.:
FPC410F1XX-CGR-CF1337


13 ~ 61 PIN

Specifications:
Rating:
Current Rating:0.2 Amp AC/DC
Voltage Rating:30V AC/DC
Operating Temperature Range:-55°~+85°C


Electrical:
Contact resistance:20m ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:200V AC/Minute

Material And Finish:
Housing:LCP(UL94V-0) Natural
Cover(ZIF):LCP(UL94V-0) Black
Terminal:C5191
Plating:Gold Plated Over Nickel
Fitting Nail:C5191 Tin plated Over Nickel

No.of	A	B	C	D	E
13	5.60	4.28	4.93	3.60	3.00
15	6.20	4.88	5.53	4.20	3.60
17	6.80	5.48	6.13	4.80	4.20
19	7.40	6.08	6.73	5.40	4.80
21	8.00	6.68	7.33	6.00	5.40
23	8.60	7.28	7.93	6.60	6.00
25	9.20	7.88	8.53	7.20	6.60
27	9.80	8.48	9.13	7.80	7.20
29	10.40	9.08	9.73	8.40	7.80
31	11.00	9.68	10.33	9.00	8.40
33	11.60	10.28	10.93	9.60	9.00
35	12.20	10.88	11.53	10.20	9.60
37	12.80	11.48	12.13	10.80	10.20
39	13.40	12.08	12.73	11.40	10.80
41	14.00	12.68	13.33	12.00	11.40
43	14.60	13.28	13.93	12.60	12.00
45	15.20	13.88	14.53	13.20	12.60
47	15.80	14.48	15.13	13.80	13.20
49	16.40	15.08	15.73	14.40	13.80
51	17.00	15.68	16.33	15.00	14.40
53	17.60	16.28	16.93	15.60	15.00
55	18.20	16.88	17.53	16.20	15.60
57	18.80	17.48	18.13	16.80	16.20
59	19.40	18.08	18.73	17.40	16.80
61	20.00	18.68	19.33	18.00	17.40

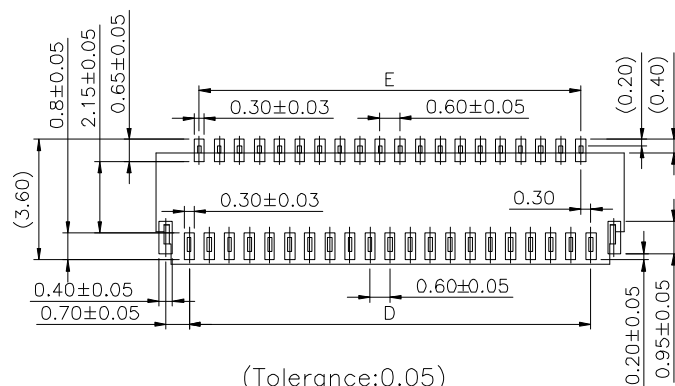

(Tolerance:0.05)
Recommended PCB Layout

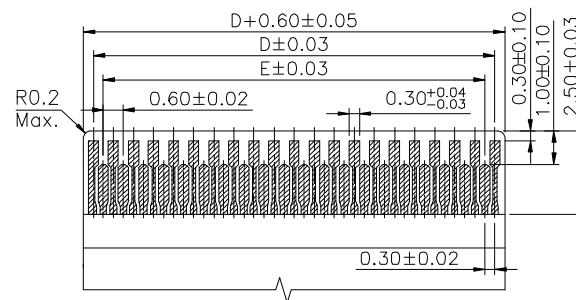

FFC/FPC Dimension(Thickness 0.20 mm)

