



A

B

C

D

E

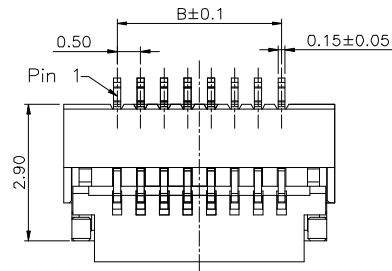

Specifications:
Rating:
Current Rating:0.4 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-55~+85°C
Max Processing Temp.:260°C for 5 Seconds




Electrical:
Contact resistance:40m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:200V AC/Minute

Material And Finish:
Housing:LCP UL94V-0 Color:Natural
Cover(ZIF):LCP UL94V-0 Color:Black
Terminal:Phosphor Bronze,
LEG:Copper Alloy With Tin Plated.
Plating:Gold Flash Over Nickel




PART NO.:
FPC310F2XX-CGR-CF1337


04 ~ 40 PIN

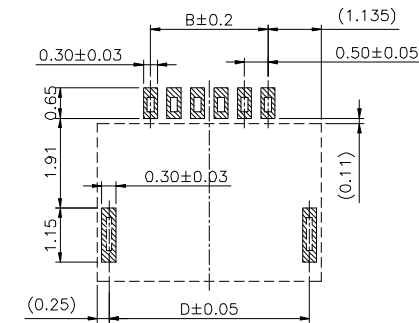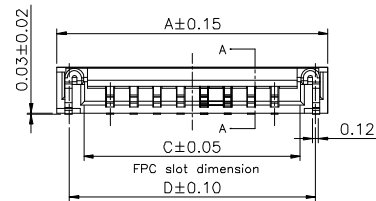

Recommended PCB Layout(Tolerance:0.05)

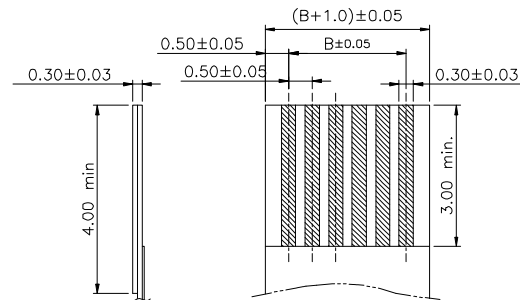

FFC/FPC Dimension(Thickness 0.30 mm)



DESCRIPTION(内容):

FPC 0.5mm H:1.0 Flip-Lock Type
(RoHS)

PART NO:
(料 號) FPC310F2XX-CGR-CF1337

DWG NO(圖號): 0005190-XX0313

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

. X ±0.20
. XX ±0.10
ANG. ±3°

SCALE(比例):

FREE



REV:
R0

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2018.04.18

A

B

C

D

E

CF1337