



A

B

C

D

E

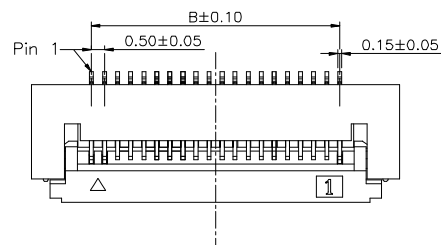







Specifications:
Rating:
Current Rating:0.5 Amp
Voltage Rating:25V AC/DC
Operating Temperature Range:-25°~+85°C
Max Processing Temp.:260°C for 5 Seconds

Electrical:
Contact resistance:40m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:200V AC/Minute


Material And Finish:
Housing:LCP UL94V-0 Color:Natural
Cover(ZIF):LCP UL94V-0 Color:Black
Terminal:Phosphor Bronze,
LEG:Copper Alloy With Tin Plated.
Plating:Tin plated Over Nickel

PART NO.:
FPC315F0XX-CTR-CF1337

04 ~ 60 PIN

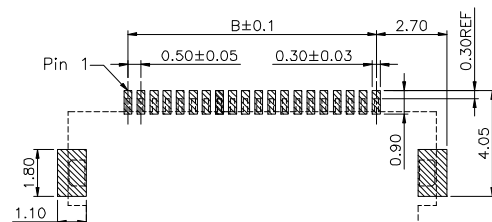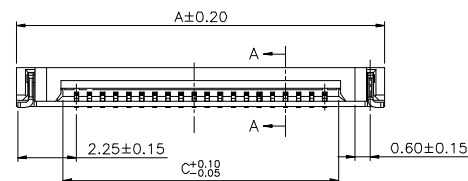

Recommended PCB Layout(Tolerance:0.05)

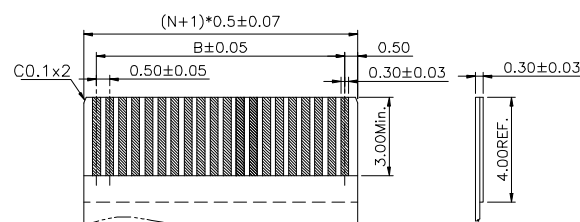

FFC/FPC Dimension(Thickness 0.30 mm)

DESCRIPTION(内容):

FPC 0.5mm H:1.5 Flip-Lock Type
(RoHS)

PART NO:
(料 號) FPC315F0XX-CTR-CF1337

DWG NO(圖號): 0005160-XX2323

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

. X ±0.20

. XX ±0.10

ANG. ±3°

SCALE(比例):

FREE



REV:
R0

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2018.04.18

A

B

C

D

E

CF1337