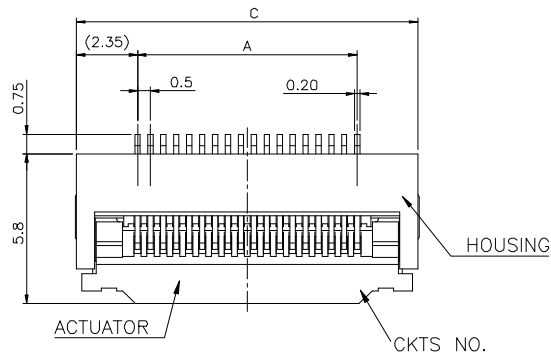


FFC/FPC Dimension(Thickness 0.30 mm)

Specifications:
Rating:
Current Rating:0.5 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-40℃~+105℃
Max Processing Temp.:260℃ for 5 Seconds


Electrical:
Contact resistance:40m Ohm Max
Insulator resistance:500m ohm min.
Withstanding Voltage:200V AC/Minute

Material And Finish:
Housing:LCP UL94V-0 Natural
Cover (ZIF):LCP UL94V-0 Black
Terminal:Phosphor Bronze,
Fitting Nail:Copper Alloy With Tin Plated.
Plating:Tin plated Over Nickel

PART NO.:
FPC320F0XX-CX X-CF1337

04 ~ 60 PIN
※為目前可生產之PIN數

R:Tape/Reel Packing
T:Tin
G:Gold

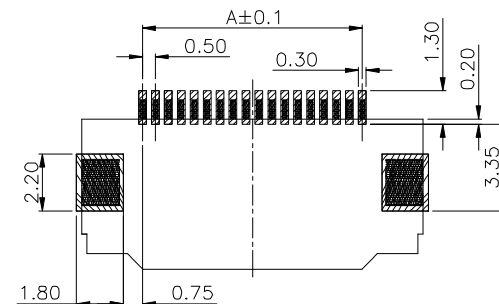

(Tolerance:0.05)
Recommended PCB Layout

No.	A	B	C
*04	1.50	2.56	6.20
*05	2.00	3.06	6.70
*06	2.50	3.56	7.20
*07	3.00	4.06	7.70
*08	3.50	4.56	8.20
*09	4.00	5.06	8.70
*10	4.50	5.56	9.20
11	5.00	6.06	9.70
*12	5.50	6.56	10.20
*13	6.00	7.06	10.70
*14	6.50	7.56	11.20
*15	7.00	8.06	11.70
*16	7.50	8.56	12.20
*17	8.00	9.06	12.70
*18	8.50	9.56	13.20
19	9.00	10.06	13.70
*20	9.50	10.56	14.20
*21	10.00	11.06	14.70
*22	10.50	11.56	15.20
23	11.00	12.06	15.70
*24	11.50	12.56	16.20
*25	12.00	13.06	16.70
*26	12.50	13.56	17.20
27	13.00	14.06	17.70
*28	13.50	14.56	18.20
29	14.00	15.06	18.70
*30	14.50	15.56	19.20
31	15.00	16.06	19.70
*32	15.50	16.56	20.20
*33	16.00	17.06	20.70
*34	16.50	17.56	21.20
*35	17.00	18.06	21.70
*36	17.50	18.56	22.20
37	18.00	19.06	22.70
38	18.50	19.56	23.20
39	19.00	20.06	23.70
*40	19.50	20.56	24.20
41	20.00	21.06	24.70
42	20.50	21.56	25.20
43	21.00	22.06	25.70
44	21.50	22.56	26.20
*45	22.00	23.06	26.70
46	22.50	23.56	27.20
47	23.00	24.06	27.70
48	23.50	24.56	28.20
49	24.00	25.06	28.70
*50	24.50	25.56	29.20
51	25.00	26.06	29.70
52	25.50	26.56	30.20
*53	26.00	27.06	30.70
*54	26.50	27.56	31.20
*55	27.00	28.06	31.70
56	27.50	28.56	32.20
57	28.00	29.06	32.70
58	28.50	29.56	33.20
59	29.00	30.06	33.70
*60	29.50	30.56	34.20