

Specifications:

Rating:

Current Rating:0.4A AC/DC

Voltage Rating:50V AC/DC

Operating Temperature Range:-25°C~+85°C

Electrical:

Contact resistance:20m Ohm Max.

Insulator resistance:500M ohm min.

Withstanding Voltage:200V AC/Minute

Material And Finish:

Housing:LCP UL94V-0 Black

Actuator:LCP UL94V-0 Black

Terminal:Phosphor Bronze,

Plating:Matte Tin or Gold Plated Overall Nickel.

LEG:Brass Matte Tin Plated Over Nickel.

PART NO:


FPC215F0 XX - CX R - CF1337

R:Tape Rell Packing


T:Matte Tin Plating
G:Gold Plating

04~33PIN

No.of CKTS	A	B	C
04	8.60	3.00	5.07
05	9.60	4.00	6.07
06	10.60	5.00	7.07
07	11.60	6.00	8.07
08	12.60	7.00	9.07
09	13.60	8.00	10.07
10	14.60	9.00	11.07
11	15.60	10.00	12.07
12	16.60	11.00	13.07
13	17.60	12.00	14.07
14	18.60	13.00	15.07
15	19.60	14.00	16.07
16	20.60	15.00	17.07
17	21.60	16.00	18.07
18	22.60	17.00	19.07
19	23.60	18.00	20.07
20	24.60	19.00	21.07
21	25.60	20.00	22.07
22	26.60	21.00	23.07
23	27.60	22.00	24.07
24	28.60	23.00	25.07
25	29.60	24.00	26.07
26	30.60	25.00	27.07
27	31.60	26.00	28.07
28	32.60	27.00	29.07
29	33.60	28.00	30.07
30	34.60	29.00	31.07
31	35.60	30.00	32.07
32	36.60	31.00	33.07
33	37.60	32.00	34.07

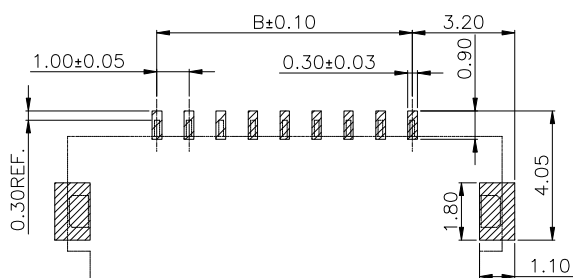

(Tolerance:0.05)
Recommended PCB Layout

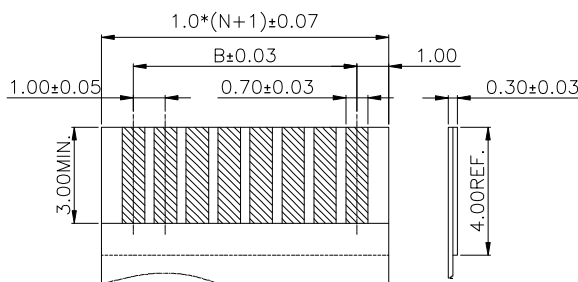

FFC/FPC Dimension (Tolerance:0.05)



DESCRIPTION(内容):

**1.0mm Pitch FPC W/ZIF SMT
Type (RoHS)**

PART NO:
(料 號) FPC215F0XX-CXR-CF1337

DWG NO(圖號): 0010282-XX2303

DRAWN(製圖):

HUANG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X ±0.30 ANG. ±3°
.X ±0.15
.XX ±0.10

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2019.03.12