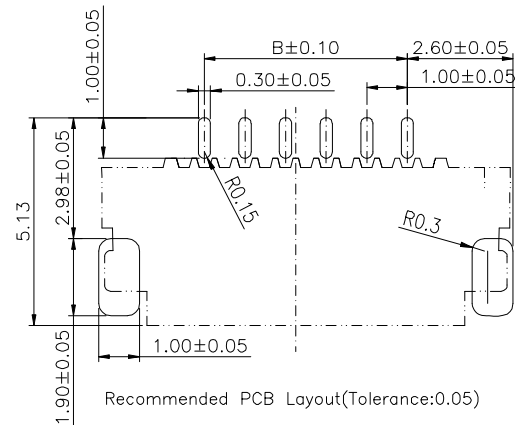


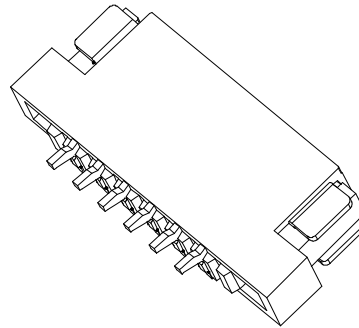
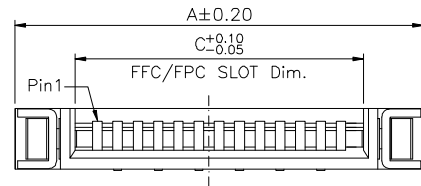
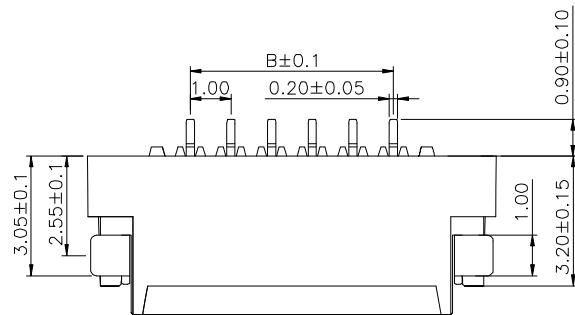


Specifications:

Rating:

Current Rating: 0.4 Amp

Voltage Rating: 50V AC/DC

Operating Temperature Range: -55°C ~ +85°C

Electrical:

Contact resistance: 40m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 200V AC/Minute

Material And Finish:

Housing: LCP UL94V-0 Natural

Terminal: Brass

Solder Pad: Brass

Plating: Tin Plated Over Nickel.



No. of CKTS	A	B	C
04	8.03	3.00	5.07
05	9.03	4.00	6.07
06	10.03	5.00	7.07
07	11.03	6.00	8.07
08	12.03	7.00	9.07
09	13.03	8.00	10.07
10	14.03	9.00	11.07
11	15.03	10.00	12.07
12	16.03	11.00	13.07
13	17.03	12.00	14.07
14	18.03	13.00	15.07
15	19.03	14.00	16.07
16	20.03	15.00	17.07
17	21.03	16.00	18.07
18	22.03	17.00	19.07
19	23.03	18.00	20.07
20	24.03	19.00	21.07
21	25.03	20.00	22.07
22	26.03	21.00	23.07
23	27.03	22.00	24.07
24	28.03	23.00	25.07
25	29.03	24.00	26.07
26	30.03	25.00	27.07
27	31.03	26.00	28.07
28	32.03	27.00	29.07
29	33.03	28.00	30.07
30	34.03	29.00	31.07

DESCRIPTION(内容):

1.0mm Pitch FPC/FFC Horizontal
SMT Type (RoHS)

PART NO:
(料 號) FPC215N0XX-CTR-CF1337

DWG NO(圖號): 0010269-XX2323

DRAWN(製圖):

HUANG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

. ±0.30 . ±3°
.0 ±0.20 .0 ±2°
.00 ±0.10 .00 ±1°
.000 ±0.05

SCALE(比例):

FREE



REV: R2

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

塑膠材質變更 (PA46→LCP)
圖號修正 (0010269-XX2421→0010269-XX2323)

圖面更新 (兩側塑膠高度修正)

DATE

2020.07.30

2020.08.12

2020.08.20