



Specifications:

1.Rating:

- 1.1:Current Rating: 0.5 Amp.
- 1.2:Voltage Rating: 50V AC/DC.
- 1.3:Operating Temperature Range: -40°C~+105°C.
- 1.4:Max Processing Temp.: 260 °C for 5 Seconds.

2.Electrical:

- 2.1:Contact resistance: 40m Ohm Max.
- 2.2:Insulator resistance: 500M ohm min.
- 2.3:Withstanding Voltage: 200V AC/Minute.

3.Material And Finish:

- 3.1:Housing: LCP UL94V-0 Natural.
- 3.2:Cover(ZIF): LCP UL94V-0 Black.
- 3.3:Terminal: Phosphor Bronze.
- 3.4:Fitting Nail: Copper Alloy With Tin Plated.
- 3.5:Plating: Tin plated Over Nickel.



Number of CKTS	Dimension		
	A	B	C
※ 04	3.00	5.06	8.70
05	4.00	6.06	9.70
※ 06	5.00	7.06	10.70
※ 07	6.00	8.06	11.70
08	7.00	9.06	12.70
09	8.00	10.06	13.70
※ 10	9.00	11.06	14.70
11	10.00	12.06	15.70
※ 12	11.00	13.06	16.70
13	12.00	14.06	17.70
14	13.00	15.06	18.70
15	14.00	16.06	19.70
※ 16	15.00	17.06	20.70
17	16.00	18.06	21.70
18	17.00	19.06	22.70
19	18.00	20.06	23.70
20	19.00	21.06	24.70
21	20.00	22.06	25.70
22	21.00	23.06	26.70
※ 23	22.00	24.06	27.70
24	23.00	25.06	28.70
25	24.00	26.06	29.70
※ 26	25.00	27.06	30.70
※ 27	26.00	28.06	31.70
28	27.00	29.06	32.70
29	28.00	30.06	33.70
30	29.00	31.06	34.70

PART NO:



FPC220F0XX-CTX-CF1337

※為目前可生產之PIN數



R:Tape/Reel Packing

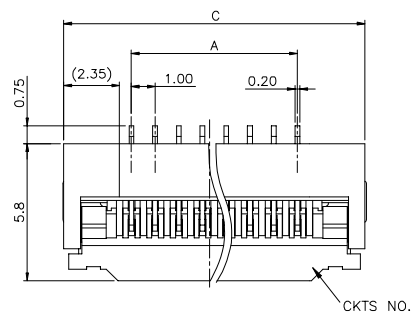


FFC/FPC Dimension(Thickness:0.30±0.03)

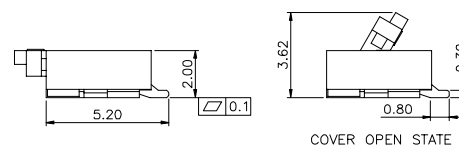

COVER OPEN STATE

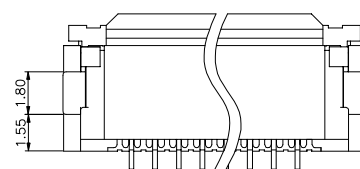

No. Pattern Area

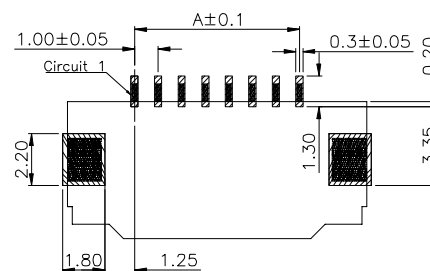

(Tolerance:0.05)
Recommended PCB Layout



DESCRIPTION(內容):
1.00mm Pitch FPC Flip-Lock Type Connector (RoHS)
PART NO:
(料號) **FPC220F0XX-CTR-CF1337**
DWG NO(圖號): **0010290-XX2323**

DRAWN(製圖):
WU
CHECKED(確認):
TERESA
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
.X ±0.20
.XX ±0.10
SCALE(比例):
FREE

REV:
R1
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
R0		2018.11.22
R1	標示目前可生產的PIN數	2020.09.21
R2		
R3		

A

B

C

D

E

CF1337