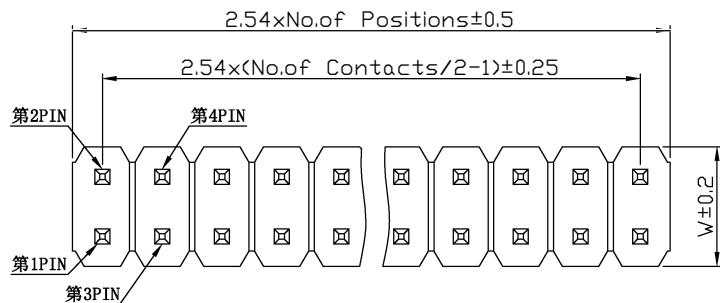


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T/NL-6T/LCP
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P22X	X	X	X	A / C / B	X X
(Pin Header Dual Row) P221 (H:2.54 W:5.08)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T C: LCP (Standard: P)	A (060) C (025) B (030) (If you desire on other length, by marking put desired in the A/C/B)	(04 TO 80 Contacts)

Selectivity:

- ☐ P221 (H:2.54 W:5.08) (Material (Standard): PBT)
- ☐ P222 (H:1.7 W:5.08) (Material (Standard): Nylon-6T)
- ☐ P223 (H:1.5 W:5.08) (Material (Standard): Nylon-6T)

Dim(6.0/2.5/3.0):

A: _____ C: _____ B: _____

DESCRIPTION(内容):

2.54mm Pin Header H:2.54 180° □=0.64
雙塑雙排 (RoHS)

PART NO:
(料號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X. ° ±5.0°
.X ±0.20 .X ° ±3.0°
.XX ±0.15 .XX ° ±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE