
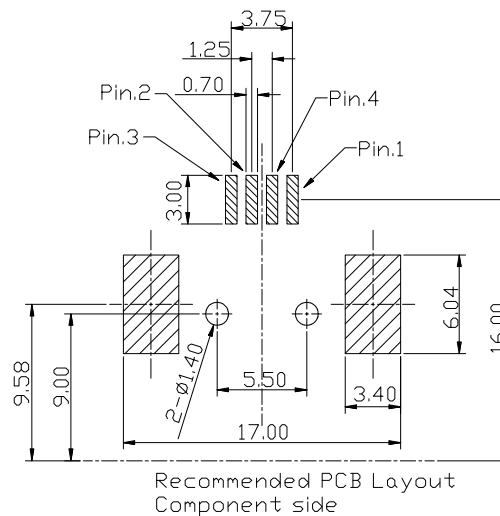
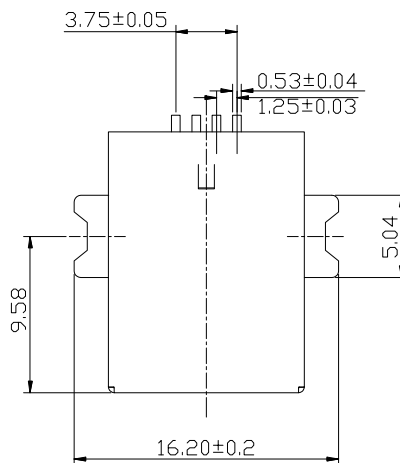
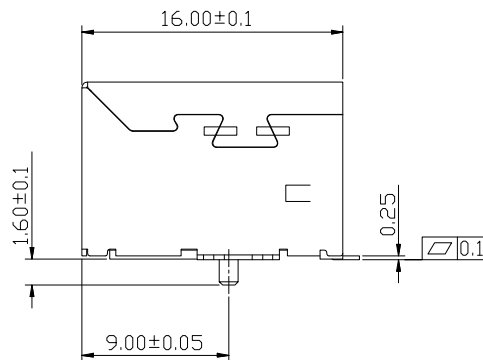


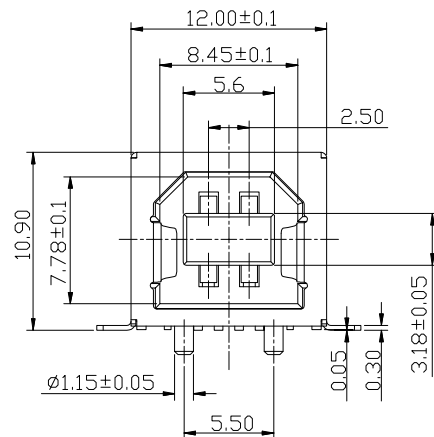

NOTES:

1. MATERIAL:

- 1.1 Housing: NL9T
- 1.2 terminals: Copper Alloy C5191
Gold plated in contact area;
Tin plated in termination
Nickel Plated overall
- 1.3 Shell; Brass
Nickel Plated overall

2. ELECTRICAL CHARACTERISTICS:

- 2.1 Rating Current :1.5 Ampere
- 2.2 Rating Voltage :30 V Max
- 2.3 Contact Resistance:30 Milli ohms
- 2.4 Insulation Resistance: 1000 Mega ohms Min.

3. MECHANICAL CHARACTERISTICS:

- 3.1 Connector Mating force: 35N MAX(3.57Kgf)
- 3.2 Connector Unmating force: 10N min(1.02Kgf)
- 3.3 Durability:150Cycles.

4. ENVIRONMENT CHARACTERISTICS:

- 4.1 Operating temperature:-0°C to + 50°C
- 4.2 Storage temperature:-20°C to + 60°C



DESCRIPTION(内容):

USB BF SMT 全贴片带柱母座
NL9T铜壳 (RoHS)

PART NO:
(料 號) UBF-041MGN1WR-CF1482

DWG NO(圖號): KNT-USBBF-SMTP

DRAWN(製圖):

ZHNAG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.0 ±0.20
.00 ±0.15
.000 ±0.10

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2024.09.20

