



**SPECIFICATIONS**

Current Rating	:5A AC,DC
Voltage rating	:250V AC,DC
Temperature range	: -25°C ~ +85°C
Contact resistance	:10mΩ Max
Insulation resistance	:1000MΩ Min
Withstanding voltage	:1500VAC/minute
Pin Material	:Brass
Finished	:Tin Plated
Housing Mateial	:LCP UL94V-0
Color	:Black

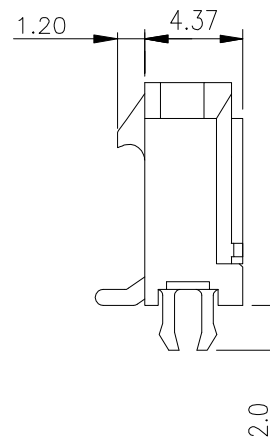

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	3.0	9.65	08	21.0	27.65
03	6.0	12.65	09	24.0	30.65
04	9.0	15.65	10	27.0	33.65
05	12.0	18.65	11	30.0	36.65
06	15.0	21.65	12	33.0	39.65
07	18.0	24.65	--	--	--

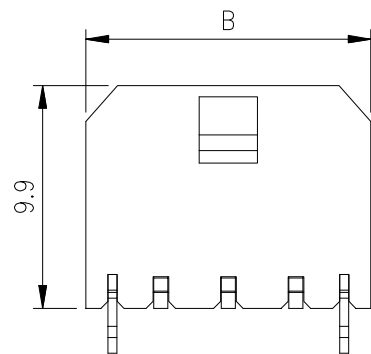

DESCRIPTION(内容):  
**MX3.0 MICRO-FIT 180° SMT**  
**Tape & Reel (RoHS)**  
 PART NO:  
 (料 號) **CMF-W300-1xXX-SRC-CF438**  
 DWG NO(圖號):

DRAWN(製圖):  
 黃炳秋  
 CHECKED(確認):  
 黃炳秋  
 APPROVAL(核准):  
 鄧文廣

GENERAL TOLERANCE:  
 (公差)  
 .X .025 ANGLE ±2°  
 .XX .020  
 .XXX .010  
 SCALE(比例):  
 1:XX

REV:  
**A/1**  
 UNIT:  
**mm**  
 SIZE:  
**A4**  
 SHEET:  
**1/2**

REV  
**1**  
**2**  
**3**  
**4**

DESCRIPTION

DATE  
**2019.09.04**

A

B

C

D

E