



SPECIFICATIONS

Current Rating	:5A AC,DC
Voltage rating	:250V AC,DC
Temperature range	:-25°C~+85°C
Contact resistance	:10mΩ Max
Insulation resistance	:1000MΩ Min
Withstanding voltage	:1500VAC/minute
Pin Material	:Brass
Finished	:Tin Plated
Housing Mateial	:LCP UL94V-0
Color	:Black

1

2

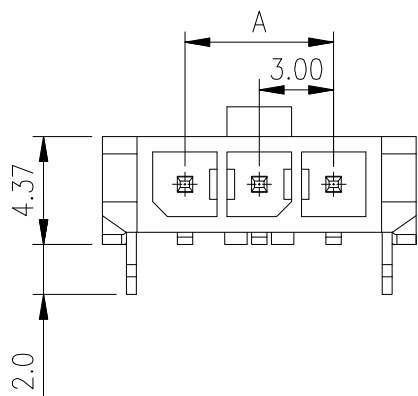

Circuits	Dimensions	
	A	B
1X02	3.00	9.65
1X03	6.00	12.65
1X04	9.00	15.65
1X05	12.00	18.65
1X06	15.00	21.65
1X07	18.00	24.65
1X08	21.00	27.65
1X09	24.00	30.65
1X10	27.00	33.65
1X11	30.00	36.65
1X12	33.00	39.65

3



DESCRIPTION(内容):
MX3.0 MICRO-FIT 90°SMT
Tape & Reel(RoHS)
 PART NO:
 (料 號) **CMF-W300R-1xXX-SRC1-CF438**
 DWG NO(圖號):

DRAWN(製圖):
 黃炳秋
 CHECKED(確認):
 黃炳秋
 APPROVAL(核准):
 邓文广

GENERAL TOLERANCE:
 (公差)
 .X .025 ANGLE
 .XX .020 均
 .XXX .010
 SCALE(比例):
 1:XX

REV:
A/2
 UNIT:
mm
 SIZE:
A4
 SHEET:
1/2

REV
1
2
3
4

DESCRIPTION
修改PCB LAYOUT

DATE
2019.08.23
2021.04.14

A

B

C

D

E