



**SPECIFICATIONS**

Current Rating :5A AC,DC  
 Voltage rating :250V AC,DC  
 Temperature range :−25°C~+85°C  
 Contact resistance :10mΩMax  
 Insulation resistance :1000MΩMin  
 Withstanding voltage :1500VAC/minute  
 Pin Material :Brass  
 Finished :Tin Plated  
 Housing Mateial :LCP UL94V-0  
 Color :Black

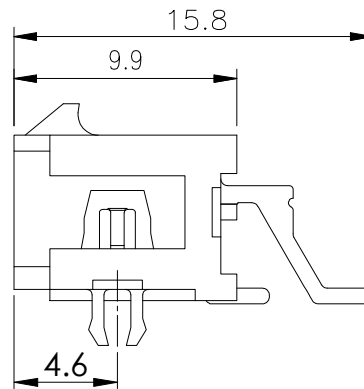

Circuits	Part No.	Dimensions	
		A	B
2X01	CMF-W300R-2x01-SRC-CF438	3.00	6.65
2X02	CMF-W300R-2x02-SRC-CF438	6.00	9.65
2X03	CMF-W300R-2x03-SRC-CF438	9.00	12.65
2X04	CMF-W300R-2x04-SRC-CF438	12.00	15.65
2X05	CMF-W300R-2x05-SRC-CF438	15.00	18.65
2X06	CMF-W300R-2x06-SRC-CF438	18.00	21.65
2X07	CMF-W300R-2x07-SRC-CF438	21.00	24.65
2X08	CMF-W300R-2x08-SRC-CF438	24.00	27.65
2X09	CMF-W300R-2x09-SRC-CF438	27.00	30.65
2X10	CMF-W300R-2x10-SRC-CF438	30.00	33.65
2X11	CMF-W300R-2x11-SRC-CF438	33.00	36.65
2X12	CMF-W300R-2x12-SRC-CF438	36.00	39.65

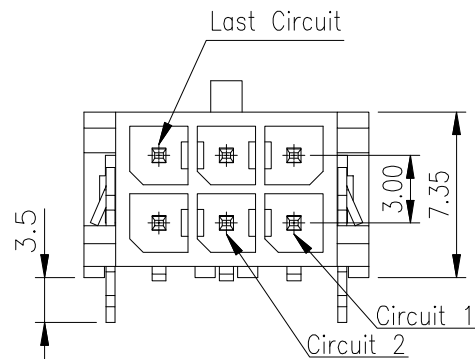

**DESCRIPTION(内容):**  
 MX3.0 MICRO-FIT D/R 90° SMT  
 Tape & Reel (RoHS)  
**PART NO:**  
 (料 號) **CMF-W300R-2xXX-SRC-CF438**  
**DWG NO(圖號):**

**DRAWN(製圖):**  
 黃炳秋  
**CHECKED(確認):**  
 黃炳秋  
**APPROVAL(核准):**  
 鄧文廣

**GENERAL TOLERANCE:**  
 (公差)  
 .X .025 ANGLE  
 .XX .020 ±2°  
 .XXX .010  
**SCALE(比例):**  
 1:XX

**REV:**  
 A/1  
**UNIT:**  
 mm  
**SIZE:**  
 A4  
**SHEET:**  
 1/2

**REV**  
 1  
 2  
 3  
 4

**DESCRIPTION**

**DATE**  
 2018.12.07

A

B

C

D

E