
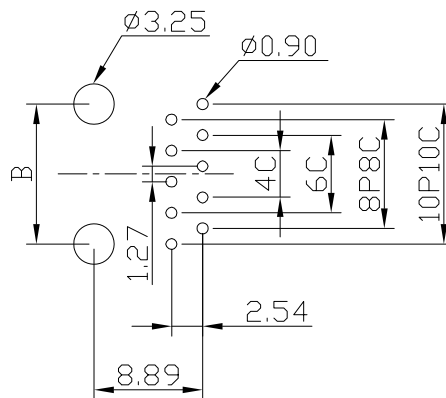





PCB LAYOUT/TOP VIEW

MATERIAL&FINISH

Housing & Insert: PBT, UL94V-0.

Conductor: 0.35mm thickness phosphor bronze.

Plating: Gold plated over nickel on contact area,

Tin plated over nickel on solder area.

Temperature: -40°C ~ 70°C.

Durability: 750 cycles min.

ELECTRICAL



Voltage Rating: 125V

Current Rating: 1.5A

Contact Resistance: 30milliohms max.

Insulation Resistance: 500 megaohms min.

Dielectric Withstanding Voltage: 1000V.



C950N XXP XXC XX BK

Housing Color
BK:BLACK

Position

4:4P
6:6P
8:8P
10:10P

GOLD Plating
06:6U"
15:15U"
30:30U"
50:50U"

Contact

2:2C
4:4C
6:6C
8:8C
10:10C

position	contact	A	B	C
4P	4C	11.20	7.62	7.80
6P	2C/4C/6C	13.20	10.16	10.00
8P	8C	15.20	11.43	12.00
10P	10C	15.20	11.43	12.00



DESCRIPTION(内容):

**SINGLE PORT, SIDE ENTRY
PCB JACK (RoHS)**

PART NO:
(料 號) **C950NXXPXXCXXBK**

DWG NO(圖號): **950NXXPXXCXXBK**

DRAWN(製圖):

KAY

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

±0.15

SCALE(比例):

FREE

REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

更換確認章

DATE

2013.01.10

2019.07.12