
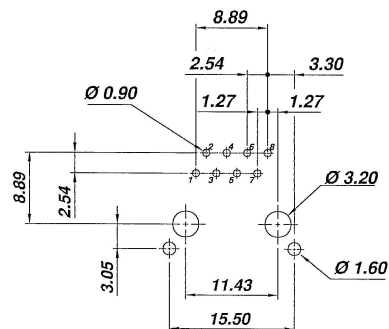

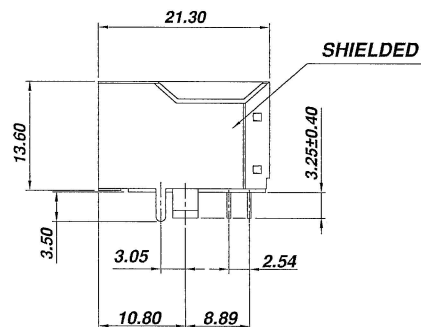




PCB LAYOUT
(Top View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC.
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing (Option) :
PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C

Color : Black Color

Spring Wire :


0.45mm Dia. Phosphor bronze Gold Plating Over Nickel

Shielded : Brass Plating Nickel

Temperature Range : - 40°C / +85°C

Durability : 500 Mating cycles Min.

CAJ-008SH-8-F-X-A1-N1



Cherng Weei Technology Corp.

TITLE

RJ45 SIDE ENTRY SHIELDED PCB JACK
(RoHS)

MODULAR JACKS ASSY FOR
CAJ-008SH-8-F-X-A1-N1

SCALE SIZE DWG. NO. 9638S SERIES

DWG. NO.

AJ-008SH-8-F-XX-A1-N1

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE		MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR MM		00±0.25 000±0.13 0000±0.05	CK'D	
CF313B20090824/mi	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D	