

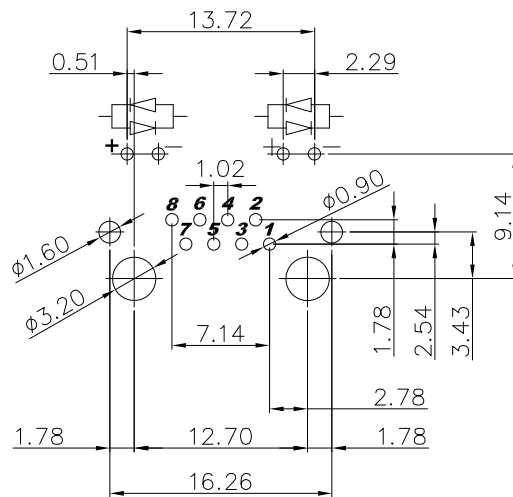
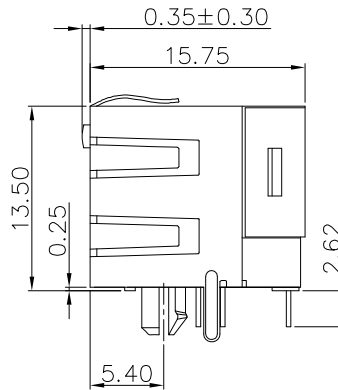


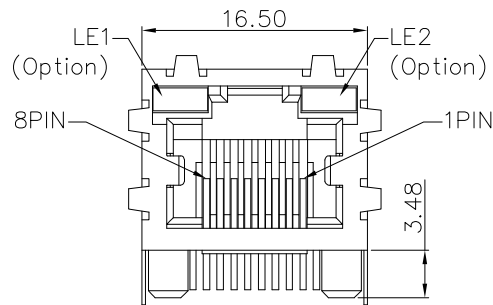

PCB LAYOUT (Top View)



SPECIFICATION:

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC.
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing:

Nylon (UL 94V-0), Soldering Temperature: 260°C for 5 Sec.

Color : Black Color.

Spring Wire :


0.35mm Thickness Phosphor bronze Gold Plating Over Nickel.

Shielded : Brass Plating Nickel.

Temperature Range : -40°C / +85°C.

Durability : 500 Mating cycles Min.

CAJ-068SH-8-F-RX-B4-N4-XX

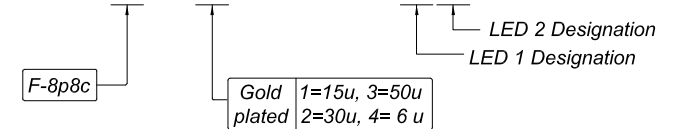

LED Designation:

Code	Forward	Reverse	Code	Forward	Reverse
G	Green	—	4	Yellow	Red
Y	Yellow	—	5	Green	Yellow
R	Red	—	6	Yellow	Green
O	Orange	—	9	Red	Green
3	Green	Red	0	Red	Yellow



DESCRIPTION(内容):

RJ45 SIDE ENTRY SHIELDED
PCB JACK (RoHS)

PART NO:
(料 號) CAJ-068SH-8-F-RX-B4-N4-XX

DWG NO(圖號): AJ-068SH-8-F-RX-B4-N4-XX

DRAWN(製圖):

Larry

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)
00 ±0.25
000 ±0.13
0000 ±0.05
ANG. ±3°

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

新增PIN位標示

更換確認章

DATE

2011.02.22

2013.11.05

2019.07.12