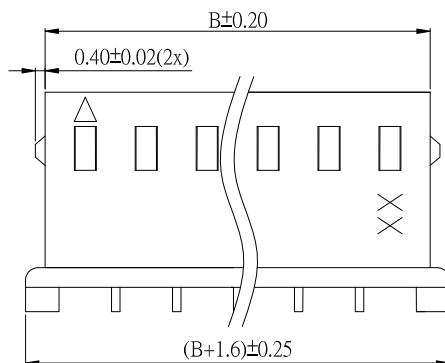

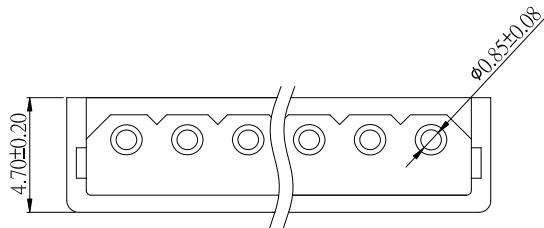


SPECIFICATION:

PITCH BETWEEN POLES: 2.5mm

CURRENT RATING: 3A

VOLTAGE RATING: 250V

CONTACT RESISTANCE: INITIAL VALUE/10mΩ max.

AFTER ENVIRONMENTAL TESTING/20mΩ max.

INSULATION RESISTANCE: 1000MΩ (min.)

WITHSTAND VOLTAGE: 1000V AC/MINUTE

TEMPERATURE RANGE: -25° C TO+85° C

APPLICABLE WIRE: AWG #22 TO #28

FEATURES:

AVAILABLE NUMBER OF CIRCUITS 2 TO 15

MATERIAL: NYLON 66 UL94V-0

Dimensional and Order information

Poles	DIM:(mm)	
	A	B
02	2.50	5.80
03	5.00	8.30
04	7.50	10.80
05	10.00	13.30
06	12.50	15.80
07	15.00	18.30
08	17.50	20.80
09	20.00	23.30
10	22.50	25.80
11	25.00	28.30
12	27.50	30.80
13	30.00	33.30
14	32.50	35.80
15	35.00	38.30
16	37.50	40.80



Part No.	Color
CB-H250-XX	Natural
CB-H250-XXR	Red
CB-H250-XXY	Yellow
CB-H250-XXB	Black
CB-H250-XXBL	Blue

DESCRIPTION(内容):

Mox 2.5mm Pitch Housing
(RoHS)

PART NO:
(料 號) CB-H250-XX _

DWG NO(圖號): 2507-H

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

.000 ±0.08
.00 ±0.13
.0 ±0.25

SCALE(比例):

FREE



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

2009更新圖面&補充Color料號說明

2014年料號P數編碼統一兩碼

變更尺寸B標示內容

DATE

2004.04.06

2009.09.03

2014.12.19

2015.12.30