
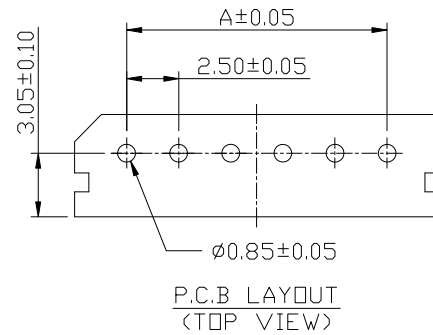
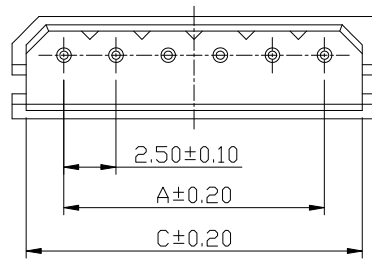

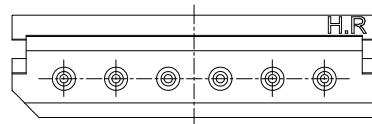
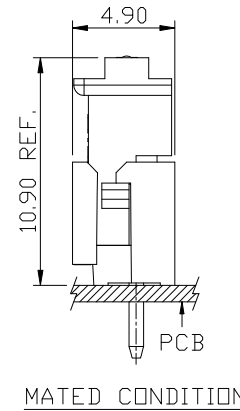



SPECIFICATION
Current Rating: 3A AC, DC.
Voltage Rating: 250V AC, DC.
Temperature Range: -25°C ~ 85°C.
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute.
Pin Material: Brass/Tin-Plated.
Solder Tabs: Brass/Tin-Plated.
Material: Nylon 66, UL94V-0.
Color: Beige(7506C)

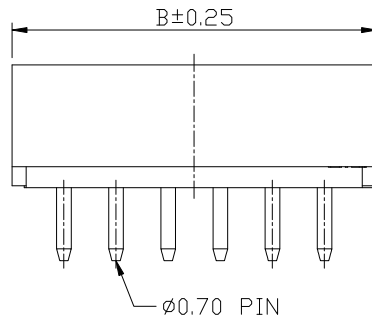

Ordering Information & Dimensions

Part NO.	Dimensions		
	A	B	C
CB-W250-02	2.50	7.50	6.12
CB-W250-03	5.00	10.00	8.62
CB-W250-04	7.50	12.50	11.12
CB-W250-05	10.00	15.00	13.62
CB-W250-06	12.50	17.50	16.12
CB-W250-07	15.00	20.00	18.62
CB-W250-08	17.50	22.50	21.12
CB-W250-09	20.00	25.00	23.62
CB-W250-10	22.50	27.50	26.12
CB-W250-11	25.00	30.00	28.62
CB-W250-12	27.50	32.50	31.12
CB-W250-13	30.00	35.00	33.62
CB-W250-14	32.50	37.50	36.12
CB-W250-15	35.00	40.00	38.62
CB-W250-16	37.50	42.50	41.12