

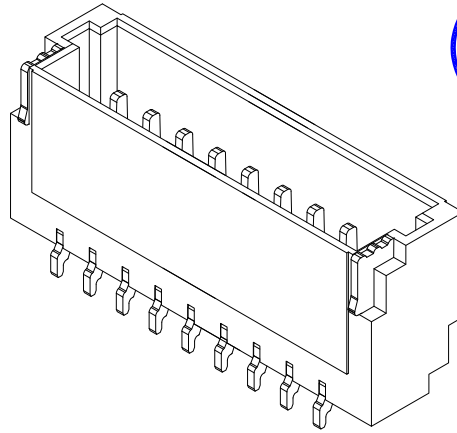
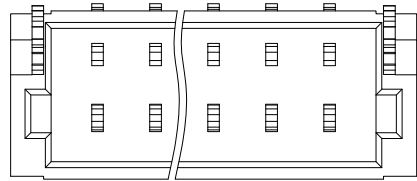
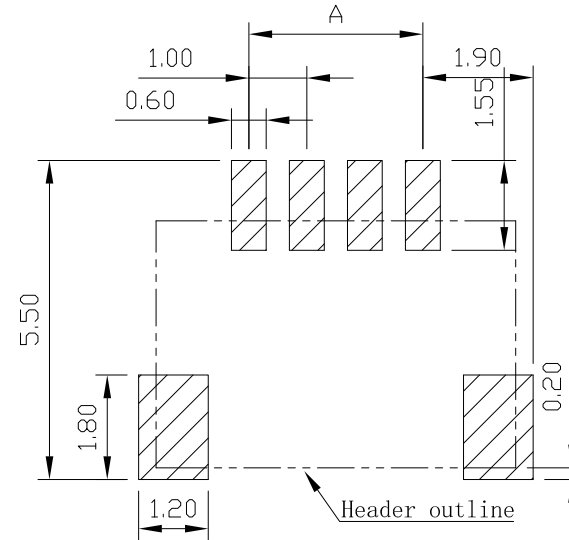


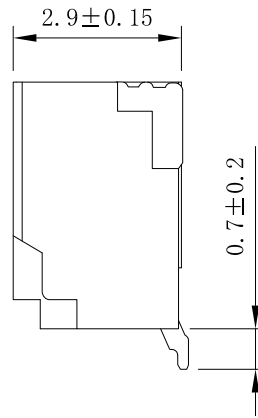

SPECIFICATIONS

Current rating	: 1A AC, DC
Voltage rating	: 50V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	: 20mΩMax
Insulation resistance	: 100MΩMin
Withstanding voltage	: 500 V AC/minute
Pin Material	: Phosphor Bronze
Finished	: Tin
Housing Material	: Nylon-6T, UL94 V-0
Color	: Natural

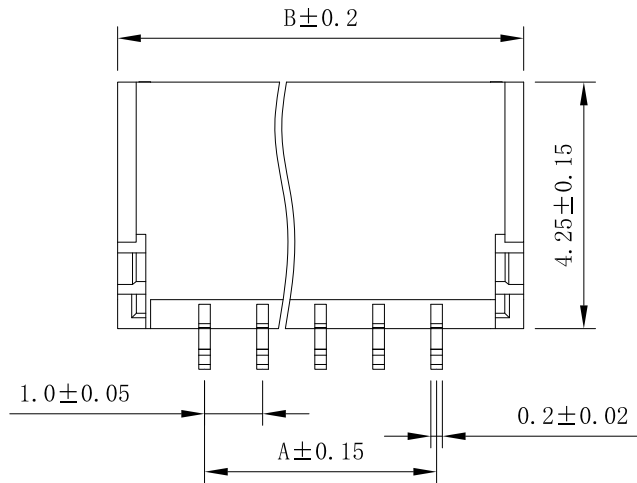

P. C. B Layout

Circuits	Dimension mm	
	A	B
2PIN	1.00	4.00
3PIN	2.00	5.00
4PIN	3.00	6.00
5PIN	4.00	7.00
6PIN	5.00	8.00
7PIN	6.00	9.00
8PIN	7.00	10.00
9PIN	8.00	11.00
10PIN	9.00	12.00
11PIN	10.00	13.00
12PIN	11.00	14.00
13PIN	12.00	15.00
14PIN	13.00	16.00
15PIN	14.00	17.00
16PIN	15.00	18.00
17PIN	16.00	19.00
18PIN	17.00	20.00
19PIN	18.00	21.00
20PIN	19.00	22.00



CHERNG WEEI

DESCRIPTION(内容):

1.0mm Wafer 90°SMT REEL PACK
(RoHS)

PART NO:
(料 號)

CCSH-W10R-XXTR

DWG NO(圖號):

DRAWN(製圖):

袁仕潤

CHECKED(確認):

黃炳秋

APPROVAL(核准):

鄧文廣

GENERAL TOLERANCE:

(公差)

.X

.XX

.XXX

.XXXX

.X °

.XX °

SCALE(比例):

1:XX



REV:

A/4

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

舊料號CSH-W10R-XXTR

五金材質:磷青銅改為黃銅

五金材質:黃銅改為磷青銅

修改Layout圖

DATE

2007.07.19

2007.10.20

2008.04.18

2008.05.22

2008.11.25

2009.06.15

FILE NO: CWJ-4E-09


A

B


C

D



E

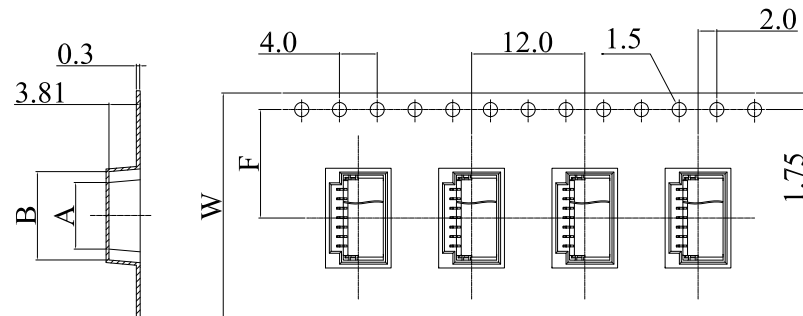收料方向
GATHER MATERIAL DIRECTION客戶放料方向
INPUT MATERIAL DIRECTION

2-13 Contacts



A-A



BI场\M+00000 瓜:A-A

備注:

- 任意10個刺輪孔的累計誤差不超過 $\pm 0.20\text{mm}$ 。
- 材料厚度以載帶成型長度為準。
- 材料:透明PS;打孔
- 載帶長度方向100mm距離的平行度不可超過1mm;超過250mm不計算累計誤差。
- 非指明;公差範圍為 $\pm 0.1\text{mm}$ 。
- 前空14后面多的保留不剪。

REEL 編碼	Poles	W	F	S	Q' TY/Reel
R1092	2	12.0	5.5		1500PCS
R1093	3	16.0	7.5		1500PCS
R1094	4	16.0	7.5		1500PCS
R1095	5	16.0	7.5		1500PCS
R1096	6	24.0	11.5		1500PCS
R1097	7	24.0	11.5		1500PCS
R1098	8	24.0	11.5		1500PCS
R1099	9	24.0	11.5		1500PCS
R10910	10	24.0	11.5		1500PCS
R10911	11	24.0	11.5		1500PCS
R10912	12	32.0	14.2	28.4	1500PCS
R10913	13	32.0	14.2	28.4	1500PCS
R10914	14	32.0	14.2	28.4	1500PCS
R10915	15	32.0	14.2	28.4	1500PCS
R10916	16	32.0	14.2	28.4	1500PCS
R10917	17	32.0	14.2	28.4	1500PCS
R10918	18	32.0	14.2	28.4	1500PCS
R10919	19	44.0	20.2	40.4	1500PCS
R10920	20	44.0	20.2	40.4	1500PCS

注:

A=1.0xPoles

B=1.0xPoles+2.3mm



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(內容):

1.0mm Wire-to-Board Header
SMT 90° Type&Reel Draw(RoHS)PART NO:
(料號) CCSH-W10R-XXTR (包裝圖)

DWG NO(圖號):

DRAWN(製圖):

李建安

CHECKED(確認):

方婷

APPROVAL(核准):

邓文广

GENERAL TOLERANCE:

(公差)

.X

.XX

.XXX


.XXXX

.X °

.XX °

SCALE(比例):

1:XX



REV:

A/4

UNIT:

mm

SIZE:

A4

SHEET:

2/2

REV

1

2

3

4

DESCRIPTION

每捲數量由1700PCS變更為1500PCS

添加備註內容

添加備註

刪除備註, 全部使用自黏上帶

2008.07.02

2011.03.18

2011.03.29

2016.03.23

A

B

C

D

E

FILE NO: CWJ-4E-09