

A



B

C

D

E

1


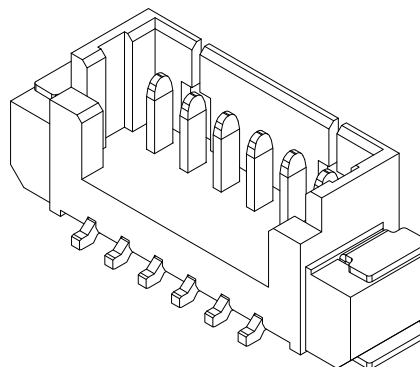
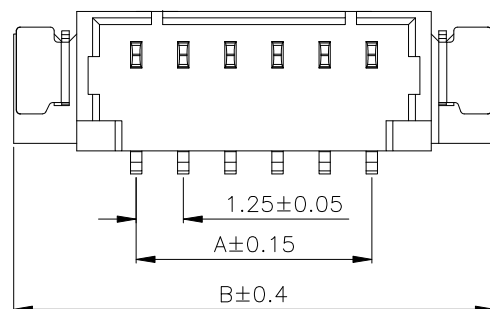


SPECIFICATIONS

Current rating	:1A AC, DC
Voltage rating	:125V AC, DC
Temperature range	: -25° C ~ +85° C
Contact resistance	:20mΩMax
Insulation resistance	:100MΩMin
Withstanding voltage	:500 V AC/minute
Pin Material	:Copper Alloy
Finished	:Matt Tin
Housing Material	:Nylon-6T, UL94 V-0
Color	:Beige



2

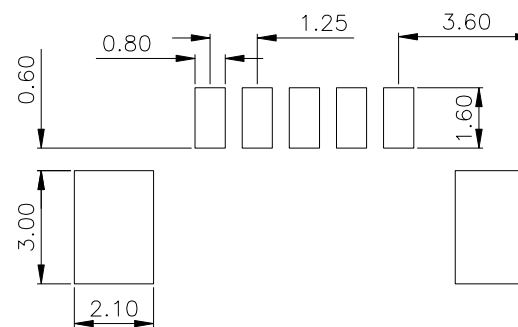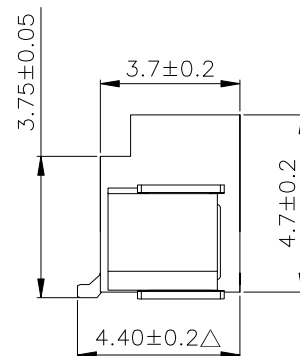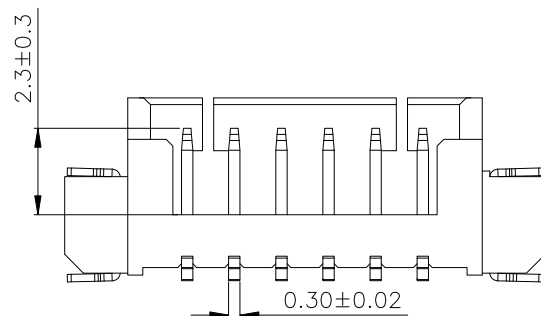

P.C.B Hole Layout

Circuits	Dimensions	
	A	B
02	1.25	7.75
03	2.50	9.00
04	3.75	10.25
05	5.00	11.50
06	6.25	12.75
07	7.50	14.00
08	8.75	15.25
09	10.00	16.50
10	11.25	17.75
11	12.50	19.00
12	13.75	20.25
13	15.00	21.50
14	16.25	22.75
15	17.50	24.00

3



CHERNG WEEI

DESCRIPTION(内容):

1.25mm Wafer 180° SMT
REEL 包裝 (RoHS)PART NO:
(料 號)

CCX-W125-XX-SMTR

DWG NO(圖號):

DRAWN(製圖):

王建平

CHECKED(確認):

王建平

APPROVAL(核准):

邓文广

GENERAL TOLERANCE:

(公差)

.0

.00

±0.20

±0.15

SCALE(比例):

1:XX



REV:

A/8

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

1

2

3

8

DESCRIPTION

△此符號表示重點管控尺寸

增加尺寸2.3±0.3

修改總長公差:由0.25改為0.4

變更塑膠高度

DATE

2007.10.09

2010.09.10

2010.11.02

2012.08.31


A

B


C

D


E

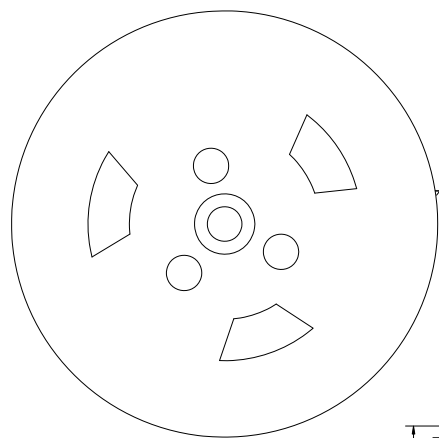

8~15PIN

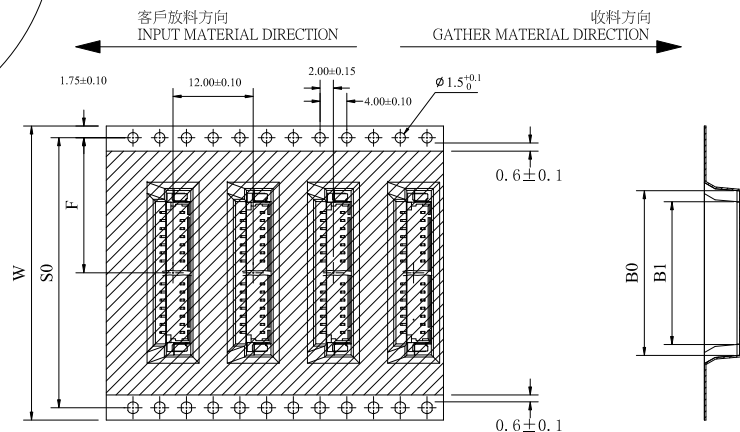

2~7PIN

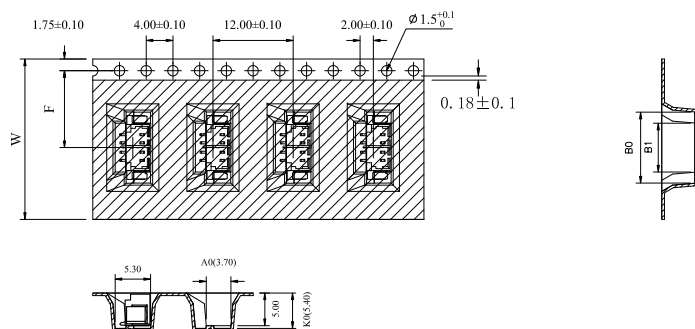

備注:

- 任意10個刺輪孔的累計誤差不超過 $\pm 0.20\text{mm}$.
- 材料:透明PS;打孔
- 載帶長度方向100mm距離的平行度不可超過1mm ; 超過250mm不計算累計誤差.
- 非指明;公差範圍為 $\pm 0.15\text{mm}$.
- 每卷盤前空14穴, 后空10穴.



REEL 編碼	Number of Contacts	W±0.3	F±0.10	B1±0.10	B0±0.10	S0±0.10	Q'TY/Reel	13"R(m)	熱封上帶規格 (mm)
R1282	02P	16	7.5	6.00	8.05		1000PCS	12.6	13.3
R1283	03P			7.25	9.30				
R1284	04P			8.50	10.55				
R1285	05P	24	11.5	9.75	11.80				21.3
R1286	06P			11.00	13.05				
R1287	07P			12.25	14.30				
R1288	08P	32	14.2	13.50	15.55				25.5
R1289	09P			14.75	16.80				
R12810	10P			16.00	18.05				
R12811	11P	44	20.2	17.25	19.30				37.5
R12812	12P			18.50	20.55				
R12813	13P			19.75	21.80				
R12814	14P			21.00	23.05				
R12815	15P			22.25	24.30				



CHONG WEI

DESCRIPTION(內容):
**1.25mm Wafer 180° SMT
REEL 包裝 (RoHS)**
PART NO:
(料 號) **CCX-W125-XX-SMTR(包裝圖)**
DWG NO(圖號):

DRAWN(製圖):
李建安
CHECKED(確認):
李建安
APPROVAL(核准):
鄧文廣

GENERAL TOLERANCE:
(公差)
.X .XXXX
.XX .X°
.XXX .XX°
SCALE(比例):
1:XX

REV:
A/6
UNIT:
mm
SIZE:
A4
SHEET:
2/2

REV	DESCRIPTION	DATE
2		2009.04.03
3	變更8PIN載帶寬度	2009.10.28
4	添加备注	2011.03.29
6	删除备注, 全部用自粘上帶	2016.03.23