



A

B

C

D

E


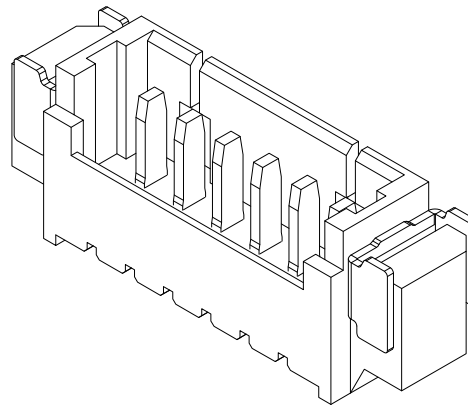
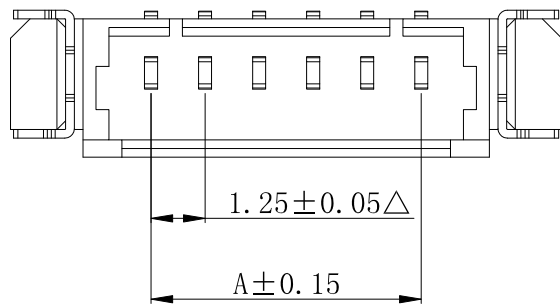


SPECIFICATIONS

Current rating	:1A AC, DC
Voltage rating	:125V AC, DC
Temperature range	:−25° C~+85° C
Contact resistance	:20mΩMax
Insulation resistance	:100MΩMin
Withstanding voltage	:500 V AC/minute
Pin Material	:Copper Alloy
Finished	:Matte Tin
Housing Material	:Nylon-6T, UL94 V-0
Color	:Beige

1

1

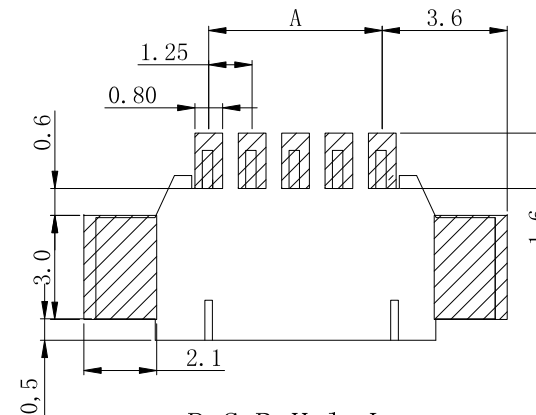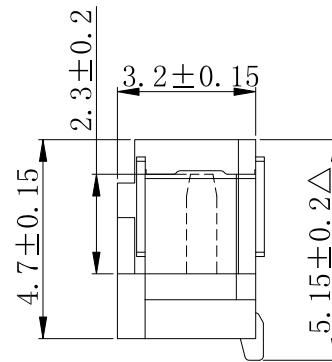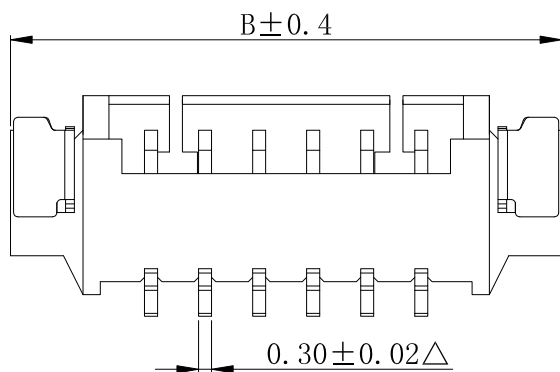


P. C. B Hole Layout



Circuits	Dimensions	
	A	B
02	1.25	7.75
03	2.50	9.00
04	3.75	10.25
05	5.00	11.50
06	6.25	12.75
07	7.50	14.00
08	8.75	15.25
09	10.00	16.50
10	11.25	17.75
11	12.50	19.00
12	13.75	20.25
13	15.00	21.50
14	16.25	22.75
15	17.50	24.00

2

2

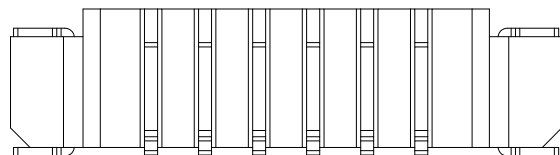

3

3



CHERNG WEEI

DESCRIPTION(内容):

1.25mm Wafer 90° SMT REEL 包裝 (RoHS)

PART NO:
(料 號)

CCX-W125R-XX-SMTR

DWG NO(圖號):

DRAWN(製圖):

黃炳秋

CHECKED(確認):

黃炳秋

APPROVAL(核准):

鄧文廣

GENERAL TOLERANCE:

(公差)

.0	±0.20
.00	±0.15

SCALE(比例):

1:XX



REV:

A/9

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

2

3

4

9

DESCRIPTION

更改塑膠外觀
增加上針尺寸

增加尺寸公差

變更塑膠高度

修正耐电压值

DATE

2008.03.03
2008.09.19

2008.12.01

2012.08.31

2016.02.23

A

B

C

D

E

