
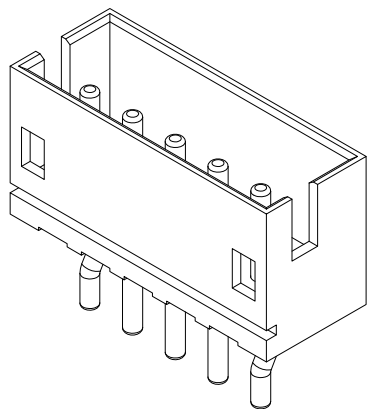


P.C.B Hole Layout


Specifications

Current Rating	: 1A AC, DC
Voltage rating	: 100V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	: 20mΩ Max
Insulation resistance	: 500MΩ Min
Withstanding voltage	: 500V AC/minute
Finished	: Tin-plated
Housing Material	: Nylon-66, UL94V-0
Color	: GRAY


Circuits	Dimensions	
	A	B
02P	1.50	4.50
03P	3.00	6.00
04P	4.50	7.50
05P	6.00	9.00
06P	7.50	10.50
07P	9.00	12.00
08P	10.50	13.50
09P	12.00	15.00
10P	13.50	16.50
11P	15.00	18.00
12P	16.50	19.50
13P	18.00	21.00



4P(含4P)以下打K

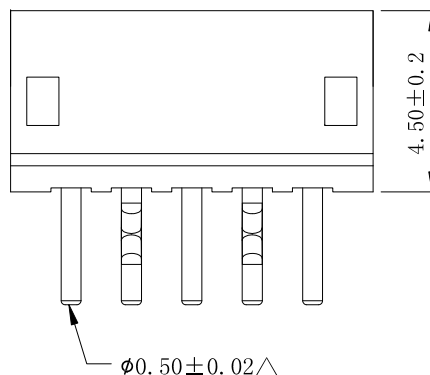

5P(含5P)以上打K

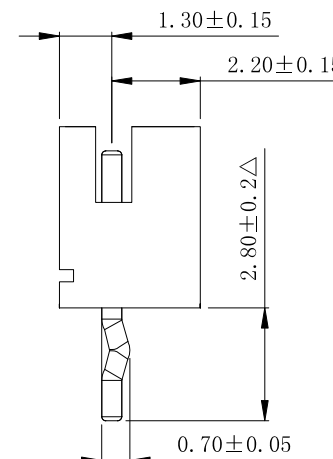







DESCRIPTION(内容):	
ZH 1.5mm Wafer 180° 圆Pin针打K (RoHS)	
PART NO: (料 號)	CCZ-W150-XX
DWG NO(圖號):	

DRAWN(製圖):	黃炳秋
CHECKED(確認):	黃炳秋
APPROVAL(核准):	鄧文廣

GENERAL TOLERANCE: (公差)	
.0	±0.20
.00	±0.15
.000	±0.10
SCALE(比例):	1:XX

REV:	A/3
UNIT:	mm
SIZE:	A4
SHEET:	1/2

REV	DESCRIPTION	DATE
1	△此符號表示重點管控尺寸	2007.11.16
2		
3	增加尺寸标注1.3±0.15	2013.05.27
4		

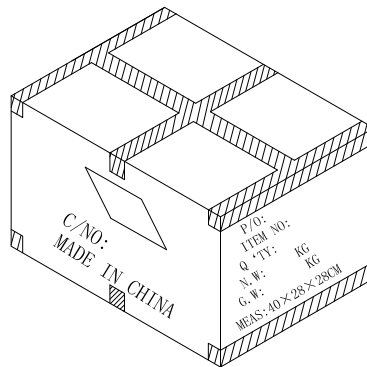

1. 紙箱規格：400*280*280mm (單重:620g).
2. 封箱方式（看上圖所示）：外箱四周使用透明的封箱膠帶封住,並封成王字型.
3. 紙箱上面一定要寫數量、毛重和淨重.

PIN數	包材規格	每袋數量	單重/g	干燥劑數量/pcs
1*02P	15X15	1000/PCS	0.05832	
1*03P	15X15	1000/PCS	0.08748	
1*04P	15X15	1000/PCS	0.11664	
1*05P	15X15	1000/PCS	0.14580	1
1*06P	15X18	1000/PCS	0.17496	1
1*07P	15X18	1000/PCS	0.20412	1
1*08P	15X18	1000/PCS	0.23328	1
1*09P	15X18	1000/PCS	0.26244	1
1*10P	15X18	1000/PCS	0.29160	2
1*11P	15X18	500/PCS	0.32076	2
1*12P	15X18	500/PCS	0.34992	2
1*13P	15X18	500/PCS	0.37908	2



DESCRIPTION(內容): ZH 1.5mm Wafer 180° 圓Pin針打K (RoHS)	DRAWN(製圖): 陳雙軍	GENERAL TOLERANCE: (公差) .X .XXXX .XX .X ° .XXX .XX°		REV: A/1	REV	DESCRIPTION	DATE		
	CHECKED(確認): 鄧文廣			UNIT: mm				1	2007.11.16
				SIZE:				2	
PART NO: (料 號) CCZ-W150-XX (包裝圖)	APPROVAL(核准): 鄧文廣	SCALE(比例): 1:XX		A4	3				
DWG NO(圖號):				SHEET: 2/2	4				