

A

B

C

D

E

Note:

Specification:

1 Current rating: 1 A Max.

2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.





3 Contact resistance: 30 mΩ Max.

4 Insulation resistance: 1000 MΩ Min at DC 500V.

5 Insertion force: 5.5 Kgf Max.

6 Extraction force: 1.7Kgf Min.

7 Temperature range: -55°C~+105°C

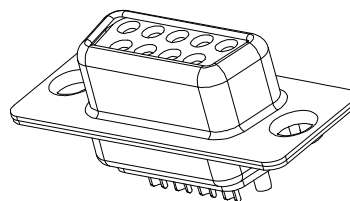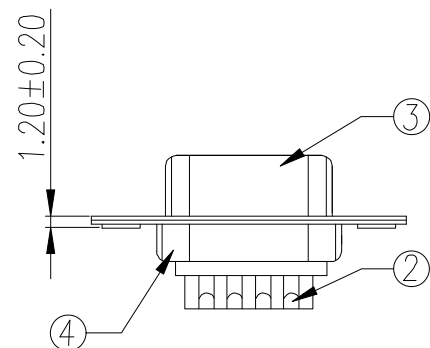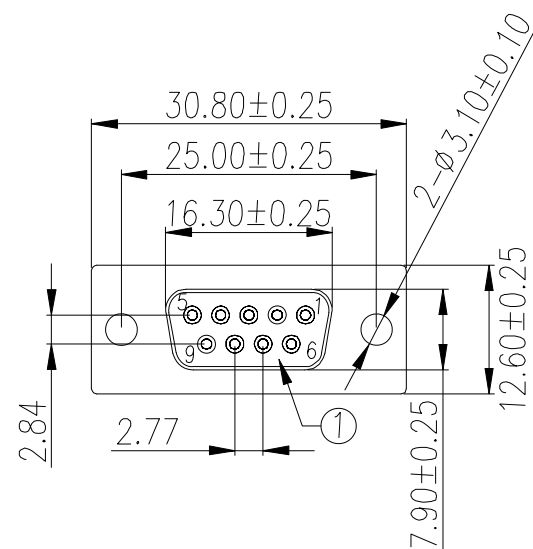

PART NO	Color
CDBD09F	Black
CDBD09F(BL)	Blue
CDBD09F(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	9	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):

D-SUB SOLDER(F) (RoHS)

PART NO:
(料 號) CDBD09F()

DWG NO(圖號): S/A-026

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差).X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

圖面更新

DATE

2015.03.12

2017.10.30

A





B

C

D

E

CF798

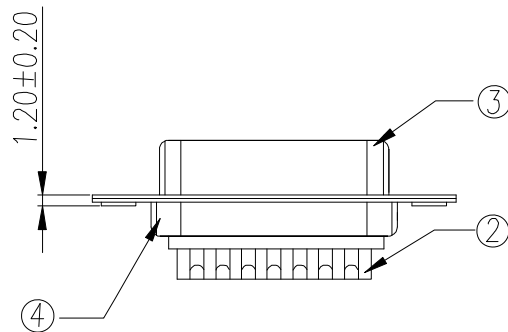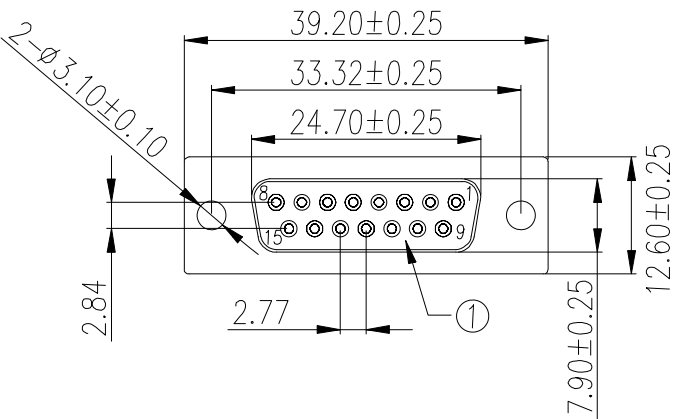

Note:
Specification:

- 1 Current rating: 1 A Max.
- 2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 3 Contact resistance: 30 mΩ Max.
- 4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 5 Insertion force: 6.5 Kgf Max.
- 6 Extraction force: 1.9Kgf Min.
- 7 Temperature range: -55°C~+105°C



PART NO	Color
CDBD15F	Black
CDBD15F(BL)	Blue
CDBD15F(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

A

B

C

D

E

Note:

Specification:

1 Current rating: 1 A Max.

2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.





3 Contact resistance: 30 mΩ Max.

4 Insulation resistance: 1000 MΩ Min at DC 500V.

5 Insertion force: 7.5 Kgf Max.

6 Extraction force: 2.7Kgf Min.

7 Temperature range: -55°C~+105°C

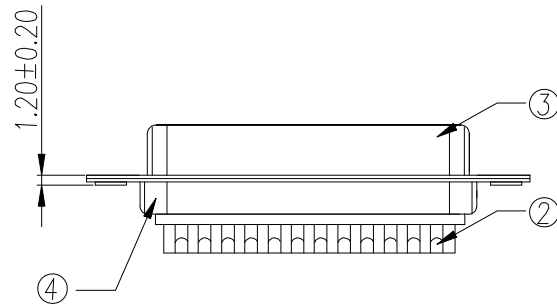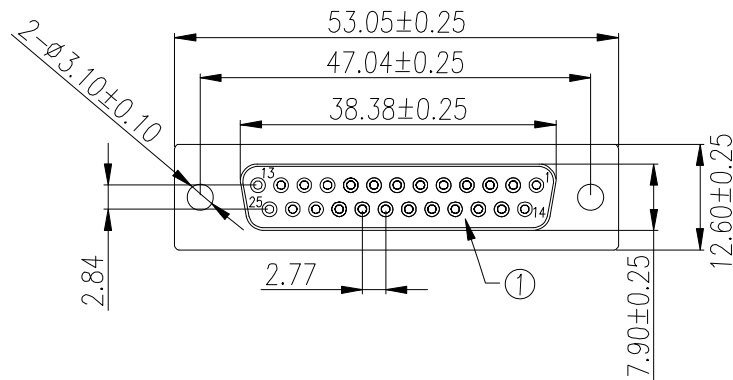

PART NO	Color
CDBD25F	Black
CDBD25F(BL)	Blue
CDBD25F(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	25	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):

D-SUB SOLDER(F)(RoHS)

PART NO:
(料 號) CDBD25F()

DWG NO(圖號): S/A-028

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差).X ±0.30
.XX ±0.20

SCALE(比例):

FREE

REV:
R1UNIT:
mmSIZE:
A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

圖面更新

DATE

2015.03.12

2017.10.30



A

B

C



D

E

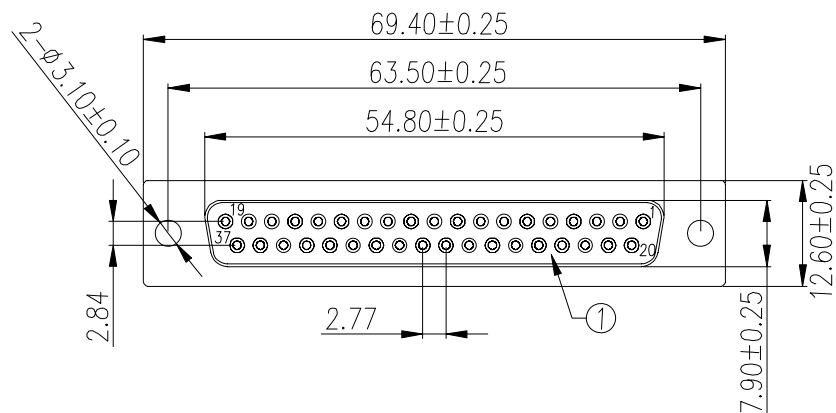

Note:
Specification:

- 1 Current rating: 1 A Max.
- 2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 3 Contact resistance: 30 mΩ Max.
- 4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 5 Insertion force: 9.0 Kgf Max.
- 6 Extraction force: 3.2Kgf Min.
- 7 Temperature range: -55°C~+105°C

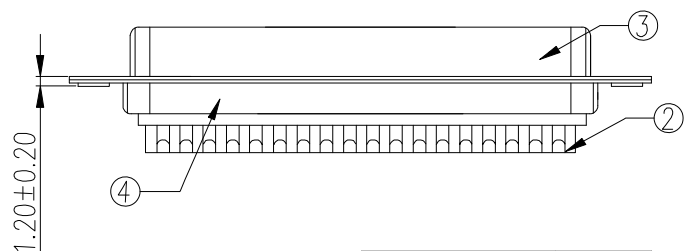

PART NO	Color
CDBD37F	Black
CDBD37F(BL)	Blue
CDBD37F(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	37	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

