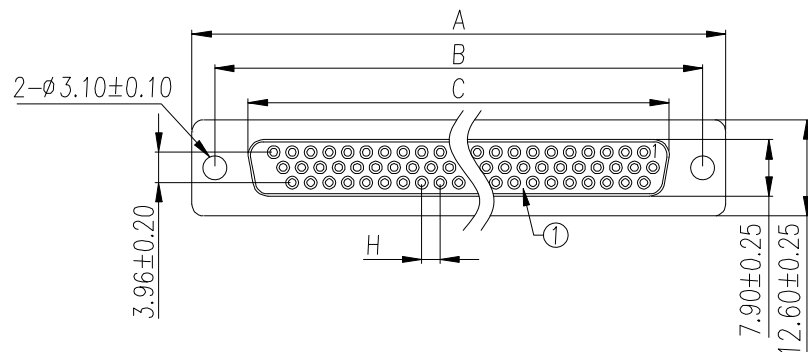


Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C



PART NO:

CDBD XX H F ()

Color: Black,BL:Blue,W:White
Series No. D-SUB 180° (Female)
H: High Density
Pin Size

Poles.	A±0.25	B±0.25	C±0.25	E
15	30.80	25.00	16.30	2.29
26	39.20	33.32	24.66	2.29
44	53.05	47.04	38.38	2.29
62	69.50	63.50	54.84	2.41

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15.26 44.62	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):

D-SUB HDD SOLDER (F) 半金 (RoHS)

PART NO:
(料 號) CDBDXXHF()

DWG NO(圖號): S/A-08X

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE(公差):

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE(RoHS)

修正電鍍Shell(Ni→Tin)&Contacts(Gold→Gold/Tin)

圖面更新 & 料號更新(原:CDBDXXHF)

圖面更新

DATE

2007.04.19

2008.08.21

2015.02.10

2017.11.27