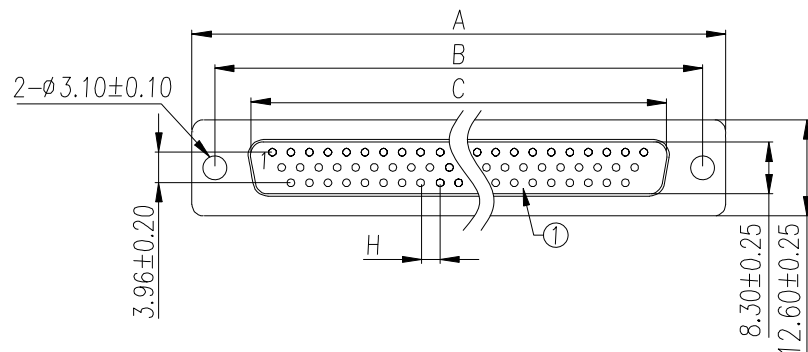


Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C



PART NO:

CDBD XX H M ()

- Color: Black,BL:Blue,W:White
- Series No. D-SUB 180° (Male)
- H: High Density
- Pin Size

Poles.	A±0.25	B±0.25	C±0.25	E
15	30.80	25.00	16.92	2.29
26	39.20	33.32	25.25	2.29
44	53.05	47.04	38.96	2.29
62	69.40	63.50	55.42	2.41

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15.26 44.62	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	1	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish