





A

B

C

D

E

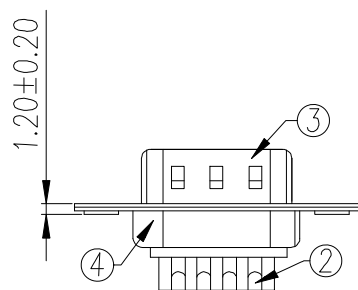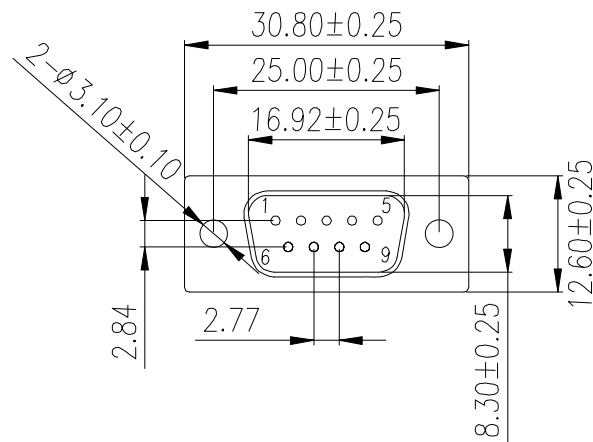

Note:

Specification:

1 Current rating: 1 A Max.

2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.

3 Contact resistance: 30 mΩ Max.

4 Insulation resistance: 1000 MΩ Min at DC 500V.

5 Mating force: 5.5 Kgf Max.

6 Unmating force: 1.7Kgf Min.

7 Temperature range: -55°C~+105°C



PART NO	Color
CDBD09M	Black
CDBD09M(BL)	Blue
CDBD09M(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	9	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

D-SUB SOLDER(M)(RoHS)

PART NO:
(料 號)

CDBD09M()

DWG NO(圖號): S/A-006

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差).X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

圖面更新

DATE

2015.03.12

2017.10.30

A





B

C

D

E

CF798

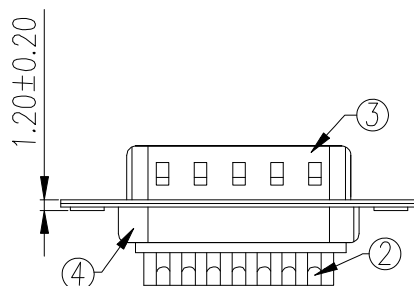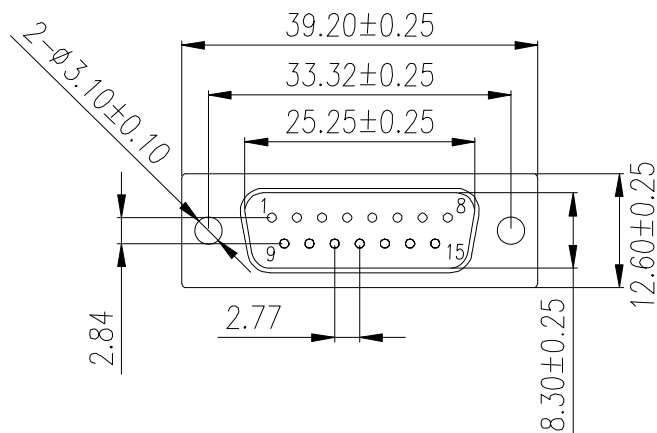

Note:

Specification:

- 1 Current rating: 1 A Max.
- 2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 3 Contact resistance: 30 mΩ Max.
- 4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 5 Mating force: 6.5 Kgf Max.
- 6 Unmating force: 1.9Kgf Min.
- 7 Temperature range: -55°C~+105°C



PART NO	Color
CDBD15M	Black
CDBD15M(BL)	Blue
CDBD15M(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

D-SUB SOLDER(M)(RoHS)

PART NO:
(料 號) CDBD15M()

DWG NO(圖號): S/A-007

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

圖面更新

DATE

2015.03.12

2017.10.30

1


2

3

1

2

3

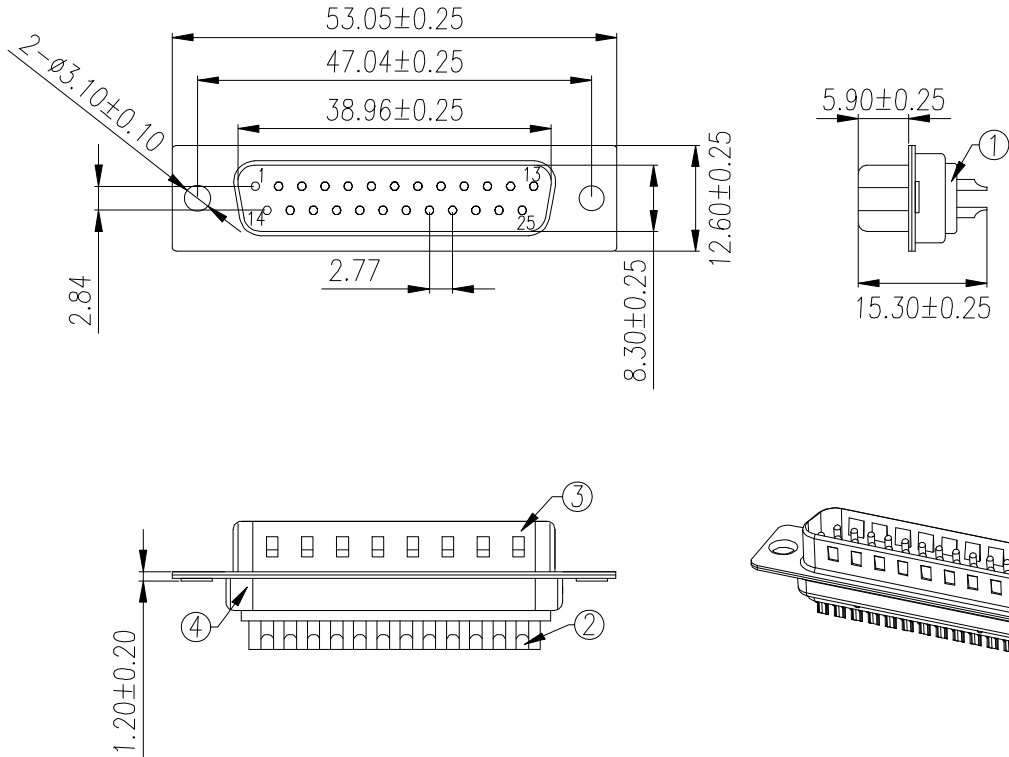

Note:
Specification:

- 1 Current rating: 1 A Max.
- 2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 3 Contact resistance: 30 mΩ Max.
- 4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 5 Mating force: 7.5 Kgf Max.
- 6 Unmating force: 2.7Kgf Min.
- 7 Temperature range: -55°C~+105°C



PART NO	Color
CDBD25M	Black
CDBD25M(BL)	Blue
CDBD25M(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	25	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):
D-SUB SOLDER(M)(RoHS)

PART NO:
(料 號) CDBD25M()

DWG NO(圖號): S/A-008

DRAWN(製圖):
GONG

CHECKED(確認):
TERESA

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):
FREE





REV:
R1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV	DESCRIPTION	DATE
R0	環保料	2015.03.12
R1	圖面更新	2017.10.30
R2		
R3		

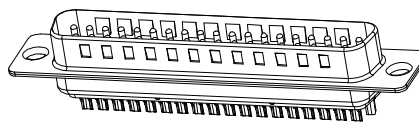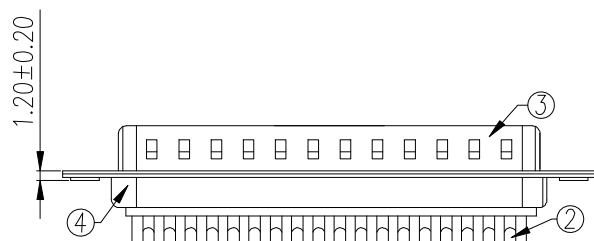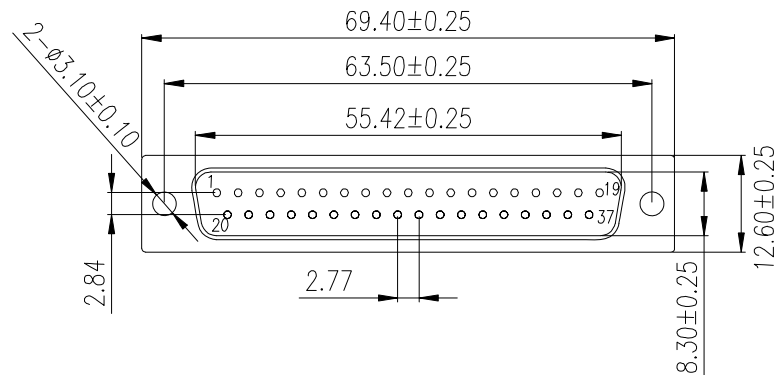

Note:

Specification:

- 1 Current rating: 1 A Max.
- 2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 3 Contact resistance: 30 mΩ Max.
- 4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 5 Mating force: 9.0 Kgf Max.
- 6 Unmating force: 3.2Kgf Min.
- 7 Temperature range: -55°C~+105°C



PART NO	Color
CDBD37M	Black
CDBD37M(BL)	Blue
CDBD37M(W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	37	Brass	T=0.20mm	Gold / Tin Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

D-SUB SOLDER(M)(RoHS)

PART NO:
(料 號) CDBD37M()

DWG NO(圖號): S/A-009

DRAWN(製圖):
GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:
R1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

圖面更新

DATE

2015.03.12

2017.10.30

A

B

C

D

E

CF798