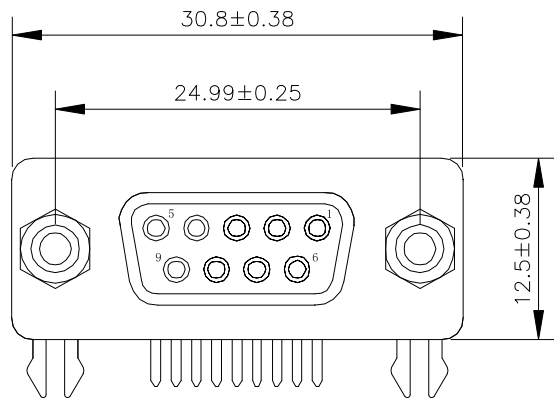





Electrical Characteristics:

- 1.Current Rating: 5 AMP
- 2.Withstanding Voltage: AC 500V for 1 Minute.
- 3.Insulation Resistance: 1000M Ω Min. at DC 500v.
- 4.Contact Resistance: 30m Ω Max.
- 5.Operating Temperature:-55° C to 105° C.

Material:

1. Insulator: PBT+30% Glass Fiber(UL94v-0).
2. Contact:Brass
- 3.Contact plated:Glod/Tin Plated
- 4.Shell:Steel Nickel Plated

PART NO.	CONTACT PLATING	COLOR
CDBR09FT	GOLD/TIN PLATED	BLACK
CDBR09FT-G		GREEN

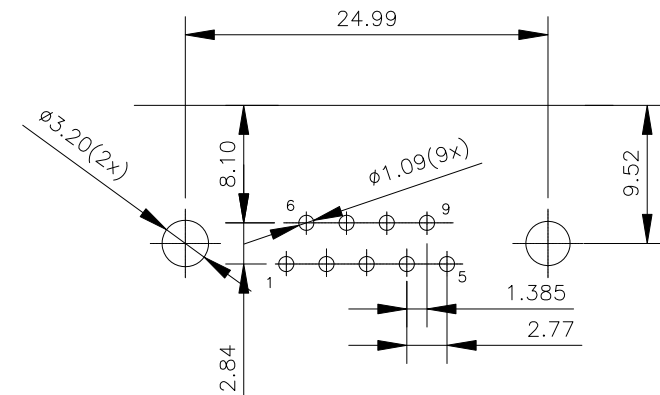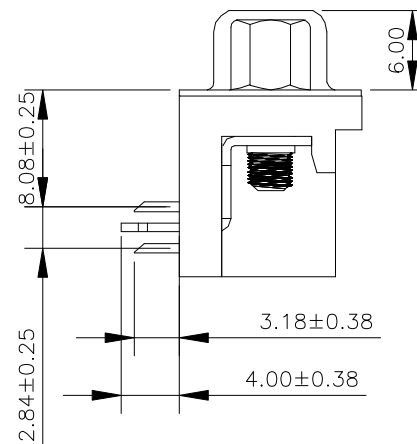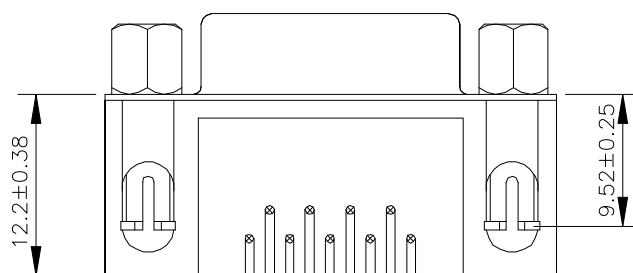

P.C.B. LAYOUT(TOLERANCE:±0.05)TOP VIEW

DESCRIPTION(內容):

D-SUB 90° 9P (F)
叉鎖 半金(RoHS)

PART NO:
(料號)

CDBR09FT-

DWG NO(圖號): AA02+0903-2080

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.0 ±.38
.00 ±.25
.000 ±.15

SCALE(比例):

FREE



REV:

R6

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

R4

R5

R6

DESCRIPTION

環保料
變更環保章字樣
變更圖號
補充螺絲圖
變更電氣特性
圖面更新
變更料號(原:CDBR09FT-)、圖號(原:AA02+0903-X080)、
圖面更新

DATE

2006.07.19
2006.08.11
2007.01.11
2007.11.05
2015.07.28
2016.05.16
2018.04.03