

P.C.B. LAYOUT (TOLERANCE: ±0.05)
TOP VIEW




NOTES:

1. MATERIAL

- 1.1 Insulator: PBT +30% Glass Fiber, UL94V-0
- 1.2 Contact: Brass
- 1.3 Contact Plated: GOLD/TIN PLATED
- 1.4 Shell: Steel, Nickel Plated

2. SPECIFICATION

- 2.1 Current Rating: 5 AMP
- 2.2 Withstanding Voltage: AC 500V for 1 Minute.
- 2.3 Insulator Resistance: 1000MΩ Min. at DC 500V.
- 2.4 Contact Resistance: 30mΩ Max.
- 2.5 Operation Temperature: -40°C to +85°C

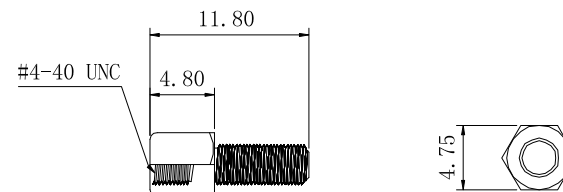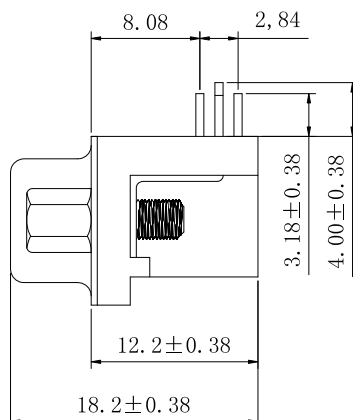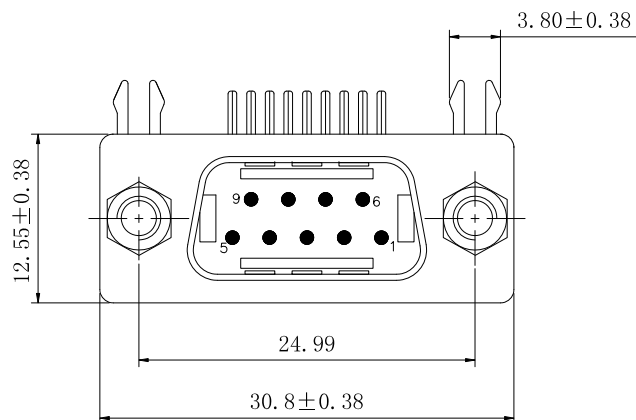

PART NO.	CONTACT PLATING	COLOR
CDBR09MT	GOLD/TIN PLATED	BLACK
CDBR09MT-G		GREEN



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

D-SUB 90° 9P(M) 叉鎖 半金 (RoHS)

PART NO:
(料號) **CDBR09MT-__**

DWG NO(圖號): **AA02+0913-2080**

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.0= ±.38
.00= ±.25

SCALE(比例):

FREE

REV:

R6

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R1

R2

R3

R4

R5

R6

DESCRIPTION

RELEASE(RoHS)

變更環保章字樣

補充螺絲尺寸

增GREEN與料號說明

圖面更新

圖面更新

DATE

2006.07.19

2006.08.11

2007.11.01

2011.07.29

2017.09.29

2018.04.17