
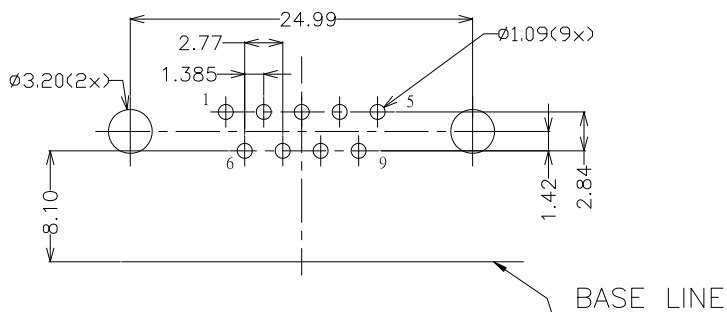





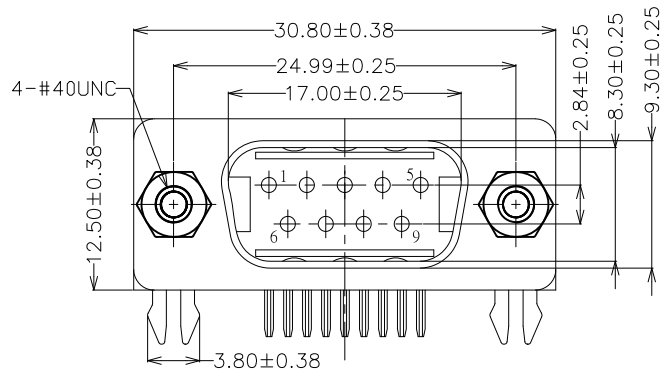


- NOTES:
 1.MATERIAL
 1.1 INSULATOR:PBT+30%Glass Fiber
 1.2 CONTACT BRASS
 1.3 CONTACT PLATED:GOLD/TIN PLATED
 1.4 SHELL:SPCC,NICKEL PLATED
 1.5 SCREW:BRASS,NICKEL PLATED

- 2.SPECIFICATION
 2.1 CURRENT RATE:5 AMPS
 2.2 INSULATOR RESISTANCE: 1000M Min AT 500V DC
 2.3 DIELECTRIC STRENGTH: 1000V PER MINUTE
 2.4 OPERATION TEMPERATURE:-40°C TO +85°C

PART NO.

CDBR 09 M XX -
 Color: Blank:Blackd G:Green
 Type: U :Rivet & Jack Screw Attached UN :Rivet UT :Rear & Jack Screw Insert
 Male Pin Size Series No. D-SUB 90°

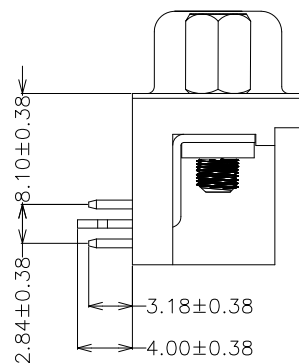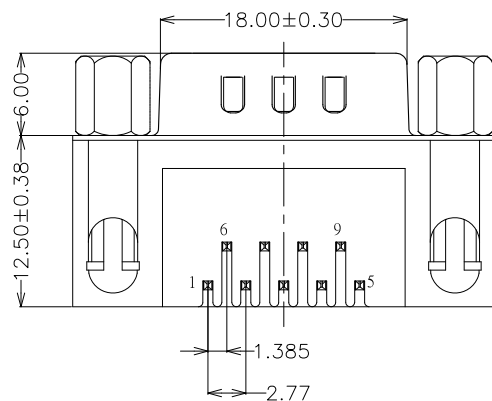

Type:		
U Type	UN Type	UT Type
鉚合附螺絲	鉚合不附螺絲	鉚合鎖螺絲