

Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.

1.2 Contact: Brass,t=0.20mm.

1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:



2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 1000 MΩ Min at DC 500V.

2.5 Temperature range: -55°C~+105°C

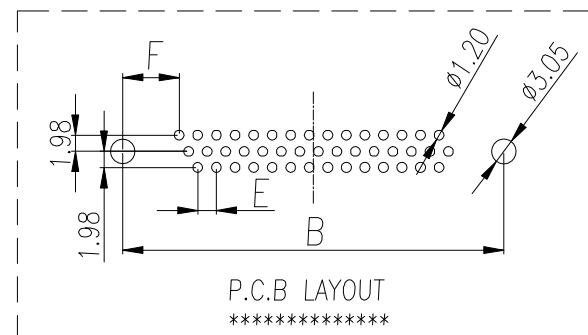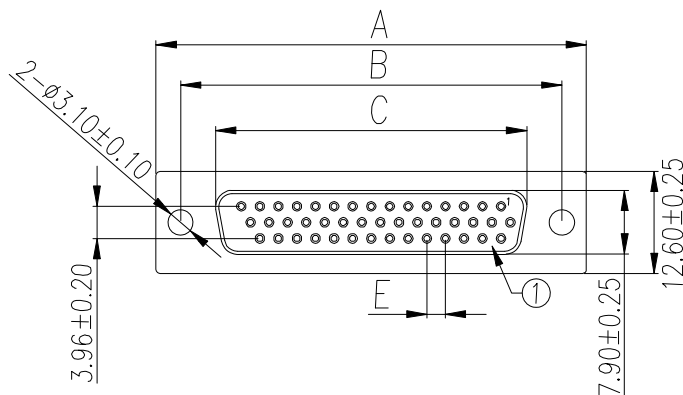

PART NO. CDBS03 XX H XXX ()


Color: Black, Blue:(BL), White:(W)

See Remark

H: High Density

Pin Size

Series No. D-SUB 180° (Female)

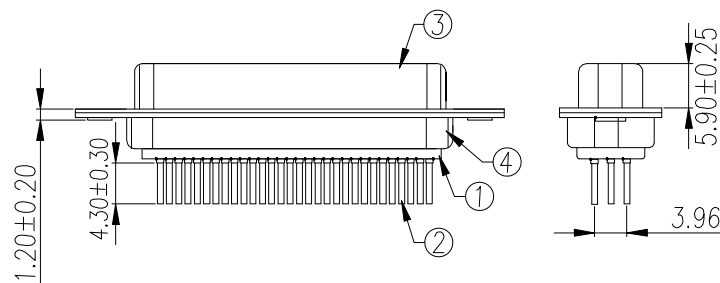

Remark:

3-2	后鉚型 (魚叉+鎖螺絲)	3	后鉚型(魚叉)	2	前鉚型(不通孔)	1	后鉚型 (前鎖螺絲)	0	后鉚型(通孔)

8	Hex Screw	2	Brass	H5*10	Nickel Plated
7	Boardlock NUT	2	Brass	H4.75*11.5	Tin Plated
6	8.0 Nut	2	Brass	H4.75*8.0	Nickel Plated
5	4.0 Nut	2	Brass	H4.75*5.5	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15.26 44.62	Brass	T=0.20mm	Gold Plated
1	Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

D-SUB HDD DIP (F) 前鉚型、后鉚型
(RoHS)

PART NO:

(料號) CDBS03XX H XXX ()

DWG NO(圖號):

S/A-2XX

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE(公差):

.X ±0.30

.XX ±0.20

SCALE(比例):

FREE

REV:

R7

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

R4

R5

R6

R7

DESCRIPTION

RELEASE

整合圖面 & 修正電鍍Shell(Ni→Tin)

新增Remark: 1(前鉚+后鉚型)

修正Remark: 1(后鉚型前鎖螺絲)

圖面更新 & 圖號更新 (原: HDIP-XXS)

修正(A)尺寸

圖面更新

圖面更新

DATE

2007.10.11

2008.08.29

2008.12.02

2009.10.21

2015.02.06

2015.10.08

2017.07.11

2017.11.27