

Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.

1.2 Contact: Brass,t=0.20mm.

1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:





2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 1000 MΩ Min at DC 500V.

2.5 Temperature range: -55°C~+105°C

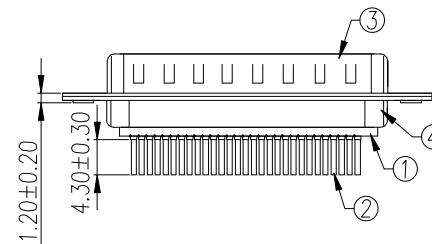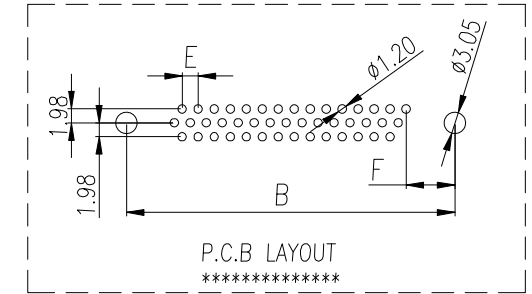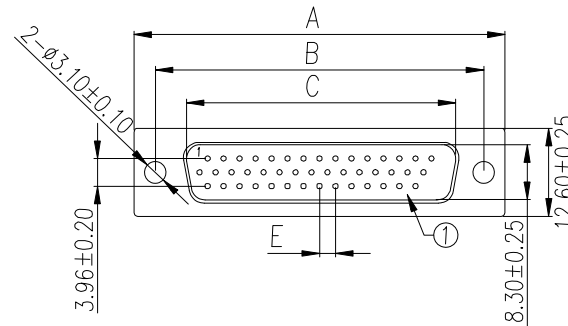

PART NO. CDBS13 XX H XXX ()

Color: Black, Blue:(BL), White:(W)

See Remark

H: High Density

Pin Size

Series No. D-SUB 180° (Male)

Poles.	A±0.25	B±0.25	C±0.25	E	F
15	30.80	25.00	16.92	2.29	7.67
26	39.20	33.32	25.25	2.29	6.99
44	53.05	47.04	38.96	2.29	6.99
62	69.40	63.50	55.42	2.41	7.07

Remark:

3-2	后鉗型 (魚叉+鎖螺絲)	3	后鉗型(魚叉)	2	前鉗型(不通孔)	0	后鉗型(通孔)

8	Hex Screw	2	Brass	H5*10	Nickel Plated
7	Boardlock NUT	2	Brass	H4.75*11.5	Tin Plated
6	8.0 Nut	2	Brass	H4.75*8.0	Nickel Plated
5	4.0 Nut	2	Brass	H4.75*5.5	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15.26 44.62	Brass	T=0.20mm	Gold Plated
1	Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish



DESCRIPTION(内容):

D-SUB DIP HDD (M) 前鉗型、后鉗型
(RoHS)

PART NO:
(料 號) CDBS13XX HXXX ()

DWG NO(圖號): S/A-22X

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE

REV:

R4

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

R4

DESCRIPTION

RELEASE
整合圖面 & 修正電鍍Shell(Ni→Tin)

圖面更新

修正(A)尺寸

圖面更新

DATE

2008.01.22
2008.08.28

2015.02.09

2015.10.08

2017.11.27