
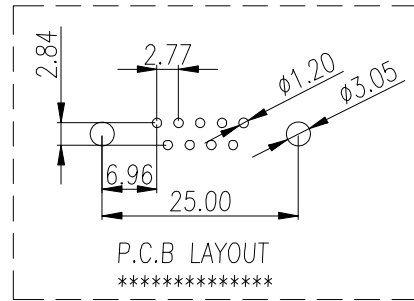


PART NO	Color
CDBS09F	Black
CDBS09F (BL)	Blue
CDBS09F (W)	White

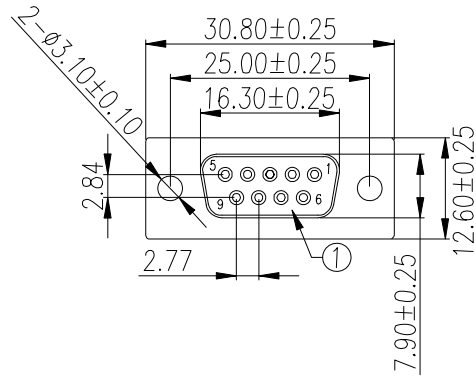

Note:

1.Material:






- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Insertion force: 5.5 Kgf Max.
- 2.6 Extraction force: 1.7 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	9	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish



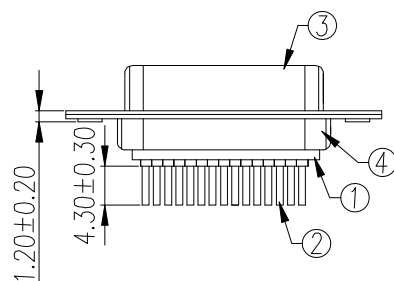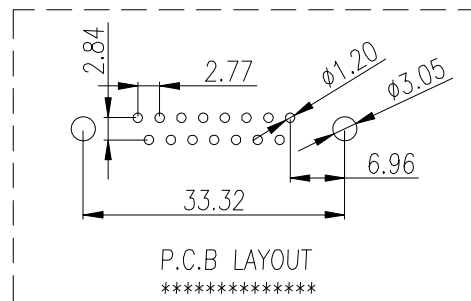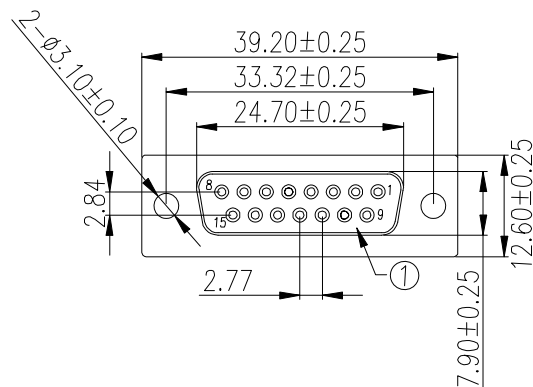

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.



2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Insertion force: 6.5 Kgf Max.
- 2.6 Extraction force: 1.9Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

PART NO	Color
CDBS15F	Black
CDBS15F (BL)	Blue
CDBS15F (W)	White



4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

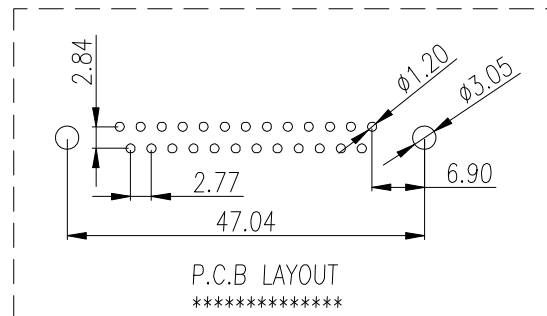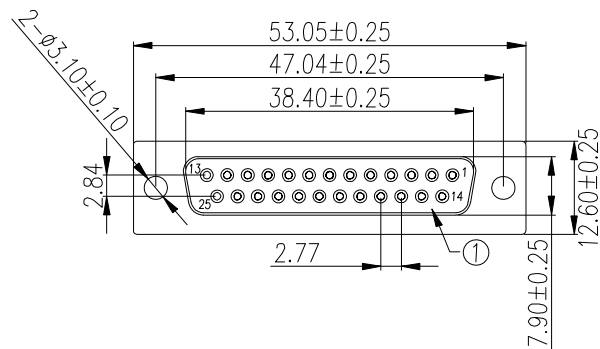




Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:






- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Insertion force: 7.5 Kgf Max.
- 2.6 Extraction force: 2.7Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

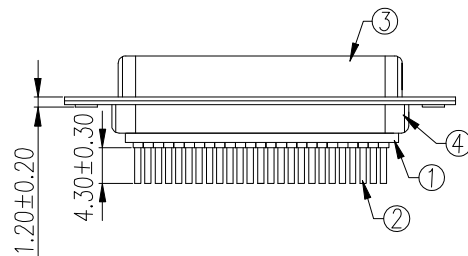

PART NO	Color
CDBS25F	Black
CDBS25F (BL)	Blue
CDBS25F (W)	White



4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	25	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

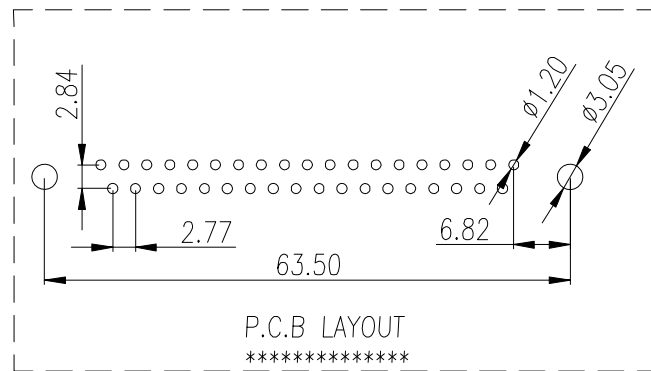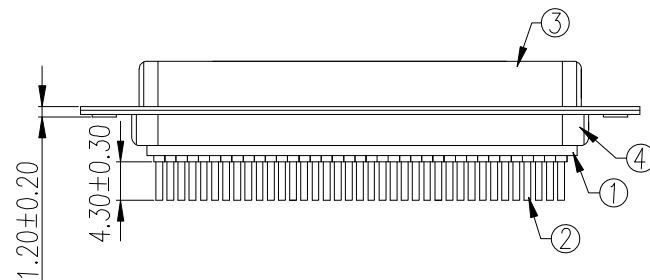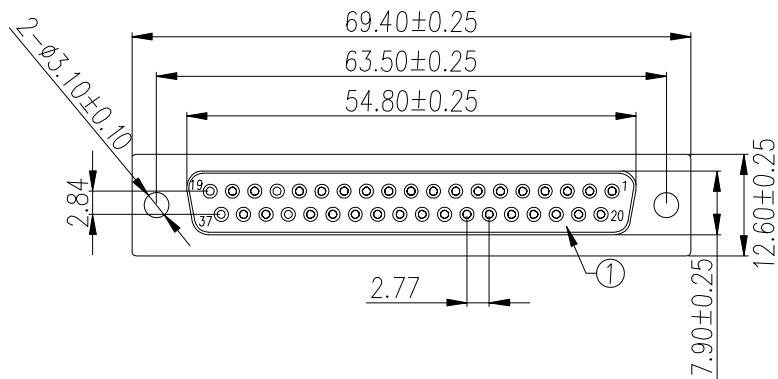

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Insertion force: 9.0 Kgf Max.
- 2.6 Extraction force: 3.2Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

PART NO	Color
CDBS37F	Black
CDBS37F (BL)	Blue
CDBS37F (W)	White

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	37	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black / Blue / White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish