

PART NO	Color
CDBS09M	Black
CDBS09M(BL)	Blue
CDBS09M(W)	White

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Insertion force: 5.5 Kgf Max.
- 2.6 Extraction force: 1.7 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C



4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	9	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'tv	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):

D-SUB DIP 180° (M)
(RoHS)

PART NO:
(料 號) CDBS09M()

DWG NO(圖號): S/A-214

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

圖面更新






圖面更新

DATE

2017.09.14

2017.10.30

2017.11.27

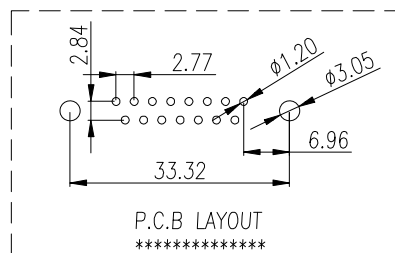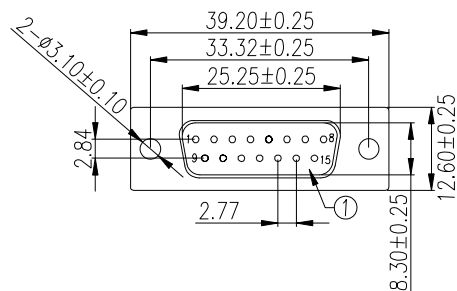

PART NO	Color
CDBS15M	Black
CDBS15M(BL)	Blue
CDBS15M(W)	White

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Insertion force: 6.5 Kgf Max.
- 2.6 Extraction force: 1.9 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C



4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'tv	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):

D-SUB DIP 180° (M) (RoHS)

PART NO:
(料 號) CDBS15M()

DWG NO(圖號): S/A-215

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

圖面更新






圖面更新

DATE

2017.09.14

2017.10.30

2017.11.27

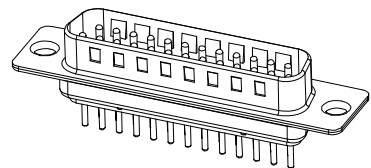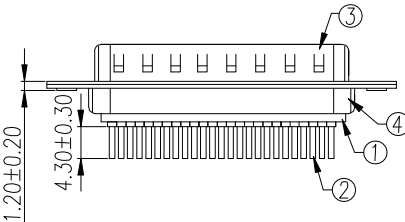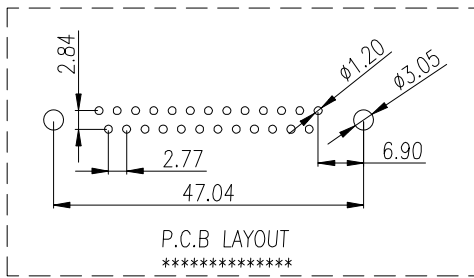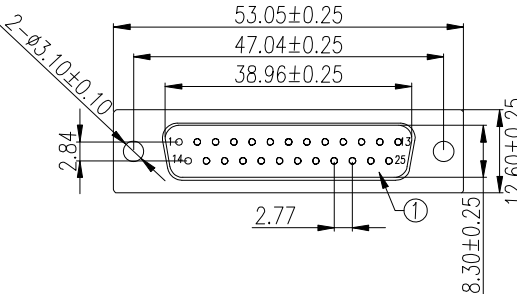

PART NO	Color
CDBS25M	Black
CDBS25M(BL)	Blue
CDBS25M(W)	White



- Note:
- Material:
 - Insulator: P.B.T UL 94-V0 rated.
 - Contact: Brass,t=0.20mm.
 - Shell: Cold rolled steel,t=0.40mm.

- Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 1000 MΩ Min at DC 500V.
 - Insertion force: 7.5 Kgf Max.
 - Extraction force: 2.7 Kgf Min.
 - Temperature range: -55°C~+105°C



4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	25	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'tv	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
D-SUB DIP 180° (M) (RoHS)		GONG		.X ±0.30 .XX ±0.20		R2			
PART NO: (料 號) CDBS25M()		CHECKED(確認): TERESA		SCALE(比例): FREE		UNIT: mm	R0		2017.09.14
DWG NO(圖號): S/A-216		APPROVAL(核准): JOHNNY				SIZE: A4	R1	圖面更新	2017.10.30
						SHEET: 1/1	R2	圖面更新	2017.11.27
							R3		

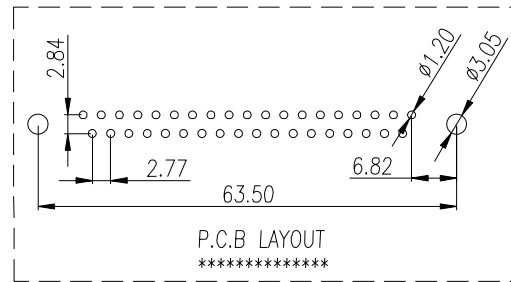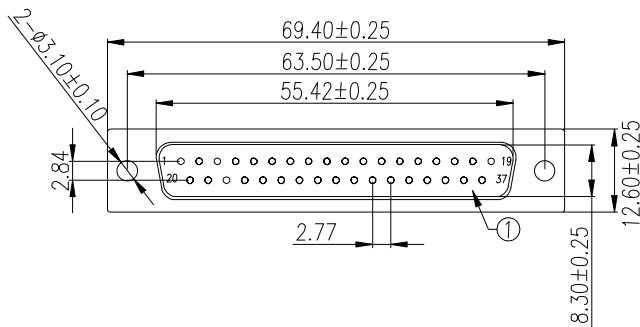



Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Insertion force: 9.0 Kgf Max.
- 2.6 Extraction force: 3.2 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

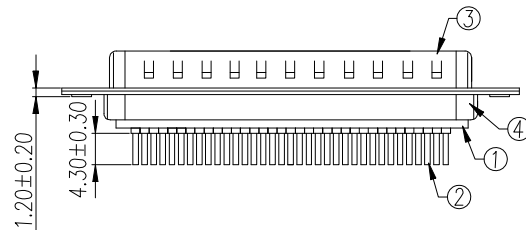

PART NO	Color
CDBS37M	Black
CDBS37M(BL)	Blue
CDBS37M(W)	White



4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	37	Brass	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'tv	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):

D-SUB DIP 180° (M)
(RoHS)

PART NO:
(料 號) CDBS37M()

DWG NO(圖號): S/A-217

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

圖面更新

圖面更新

DATE

2017.09.14

2017.10.30

2017.11.27