

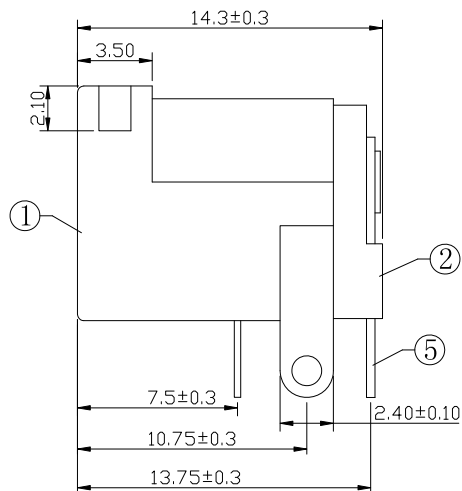
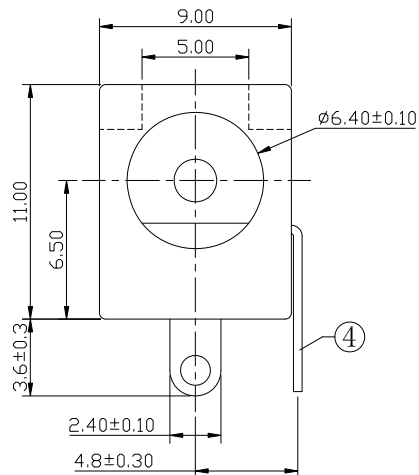
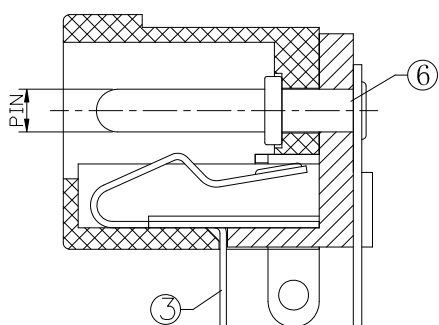


P. C. B LAYOUT
TOP VIEW

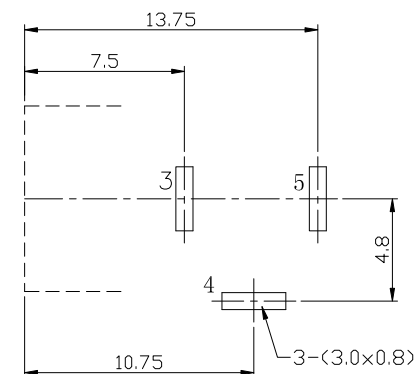

SCHEMATIC



SPECIFICATION

- Rating : DC 30V 1.0A;
- Contact resistance: $\leq 0.03\Omega$;
- Insulation resistance: $\geq 100M\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- Life test: 5,000 cycles.



Part No.	CDJ-D005B-2.0	CDJ-D005B-2.5
PIN	Ø2.0	Ø2.5

6	PIN	1	BRASS	——	Ni-Plating
5	FLAT FOOT	1	BRASS	——	Sn-Plating
4	SPRING PIECE	1	BRASS	——	Sn-Plating
3	CURVE PIECE	1	BRONZE	——	Sn-Plating
2	COVER	1	PBT(UL-94V0)	——	——
1	HOUSING	1	PBT(UL-94V0)	——	——
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

DESCRIPTION(内容):

**DC Power JACK (14.3) 90°
(RoHS)**

PART NO:
(料 號) **CDJ-D005B-XX**

DWG NO(圖號): **DJ-D005B**

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:
R3

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

更正"Resistance" 單位

圖面更新

補充塑膠防火等級

DATE

2013.11.08

2014.03.24

2018.07.23

2018.11.23