
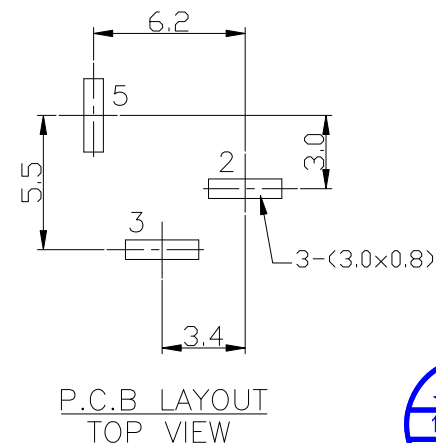
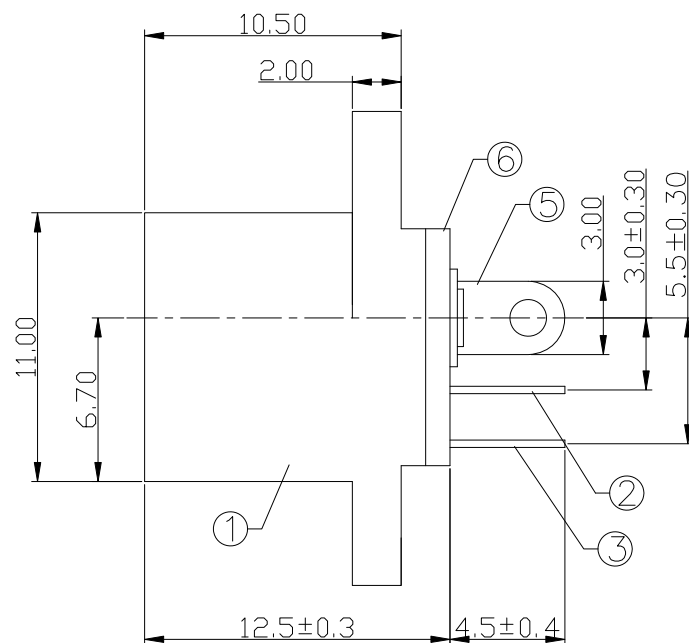


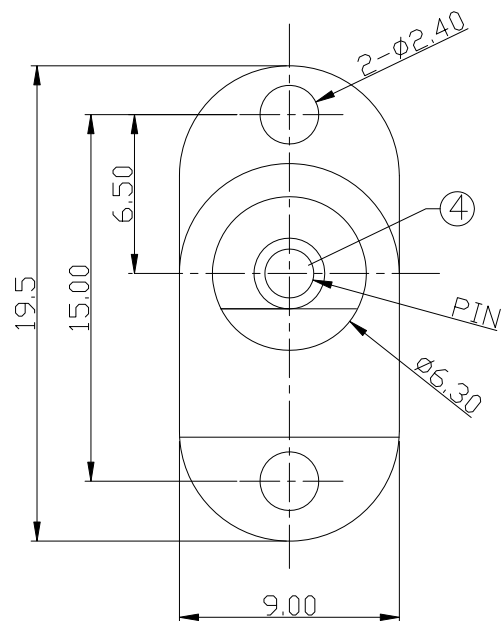

SPECIFICATION

- Rating : DC 30V 1.0A;
- Contact resistance: $\leq 0.03\Omega$;
- Insulation resistance: $\geq 100M\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- life test: 5,000 cycles.

PART NO.	PIN	SCHEMATIC
CDJ-D017-2.0	φ2.0	
CDJ-D017-2.35	φ2.35	
CDJ-D017-2.5	φ2.5	

6	COVER	1	PF	Sn-Plating
5	CONTACT FOOT	1	BRASS	Ni-Plating
4	PIN	1	H59 BRASS	Sn-Plating
3	SPRING	1	SUS301	Sn-Plating
2	FLAT FOOT	1	H62 BRASS	_____
1	HOUSING	1	PBT	_____
NO.	DESCRIPTION	QTY	MATERIAL	REMARK