


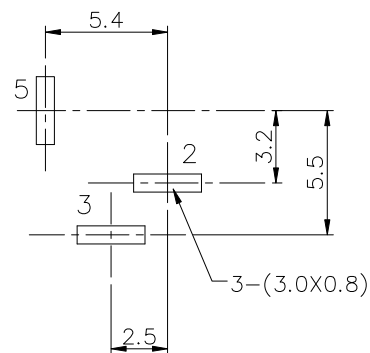


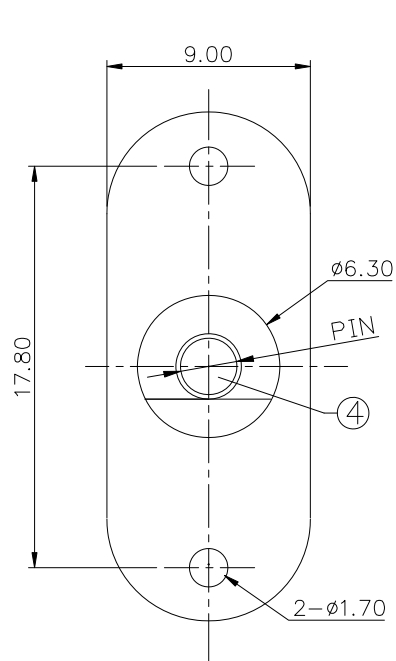

P.C.B LAYOUT
TOP VIEW

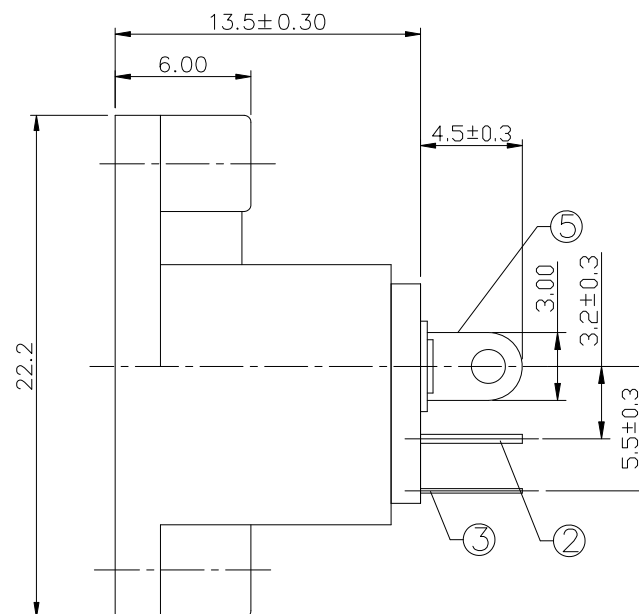

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 1.0A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles。

PART NO:

CDJ-D018-XX

PIN
2.0:ø 2.0
2.5:ø 2.5

6	COVER	1	PF	——
5	CONTACT FOOT	1	BRASS	Sn-Plating
4	PIN	1	BRASS	Ni-Plating
3	SPRING	1	SUS301	Sn-Plating
2	FLAT FOOT	1	BRASS	Sn-Plating
1	HOUSING	1	PBT	——
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

DESCRIPTION(内容):

DC JACK (13.5) DIP(RoHS)

PART NO:
(料 號) CDJ-D018-XX

DWG NO(圖號): DJ-D018

DRAWN(製圖):

Larry

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差) X ±0.50 X ± 3'
XX ±0.30 XX ± 2'
XXX ±0.20 XXX ± 1'
XXX ±0.10

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

更正"Resistance"單位

更換確認章

DATE

2013.10.29

2014.03.24

2020.03.30