


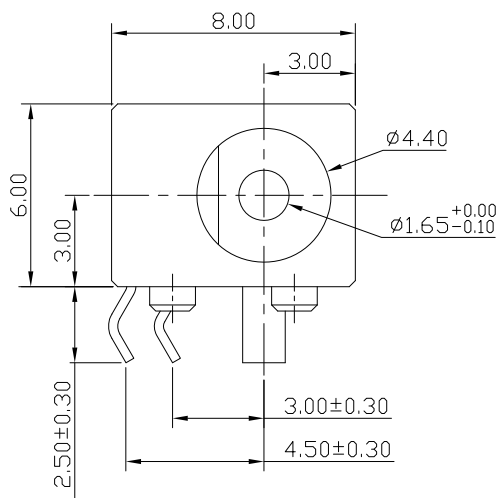
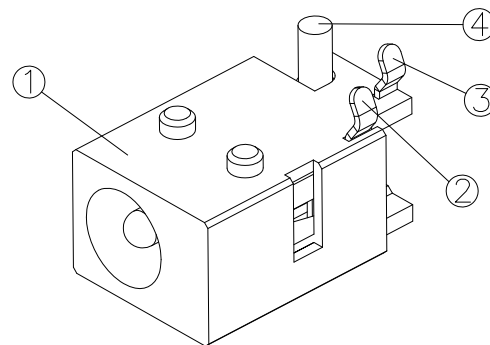
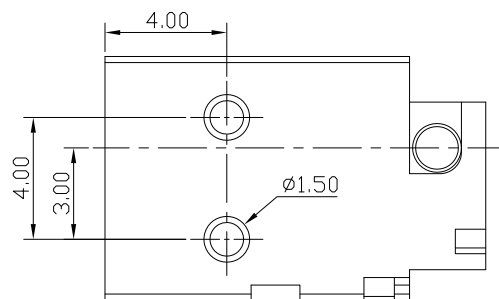
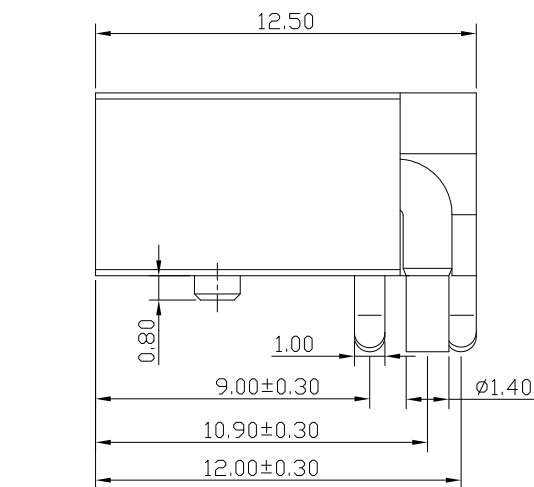




SCHEMATIC



P.C.B LAYOUT
TOP VIEW

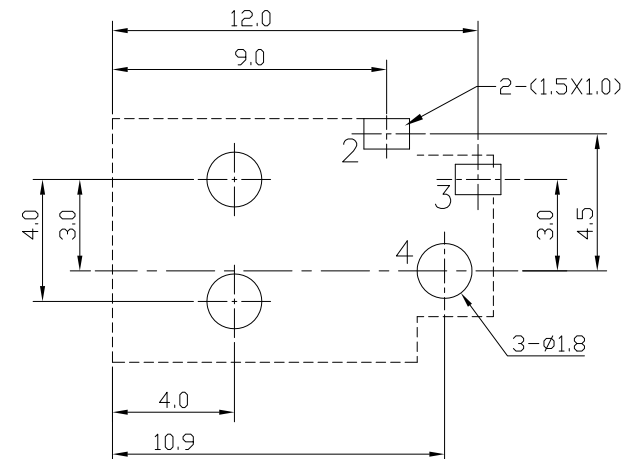

SPECIFICATION

- Rating : DC 30V 1.0A;
- Contact resistance: $\leq 0.03\Omega$;
- Insulation resistance: $\geq 100M\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- life test: 5,000 cycles.



NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
4	PIN	1	BRASS	—	Ni-Plating
3	CURVE PIEVE	1	BRASS	—	Ag-Plating
2	SPRING	1	BRONZE	—	Ag-Plating
1	HOUSING	1	PBT	—	—