

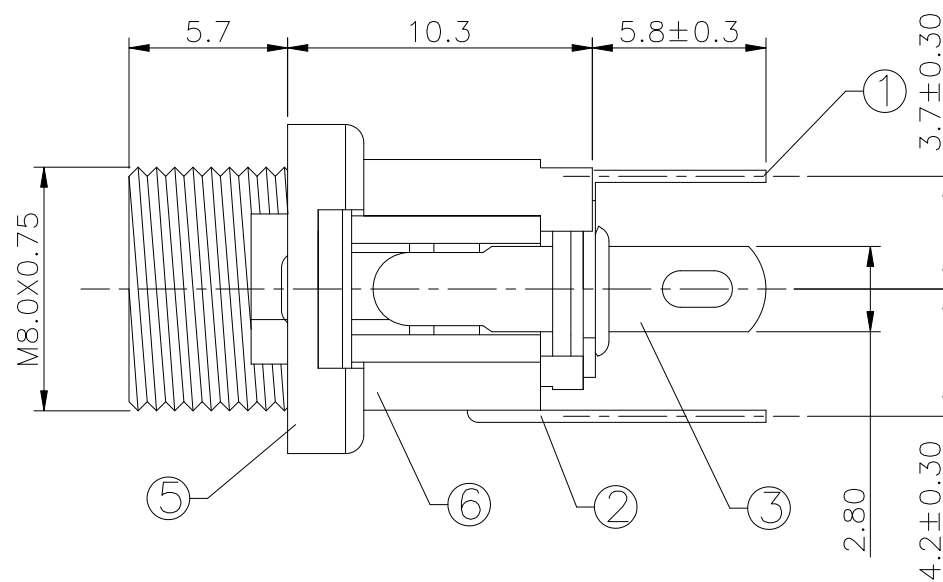


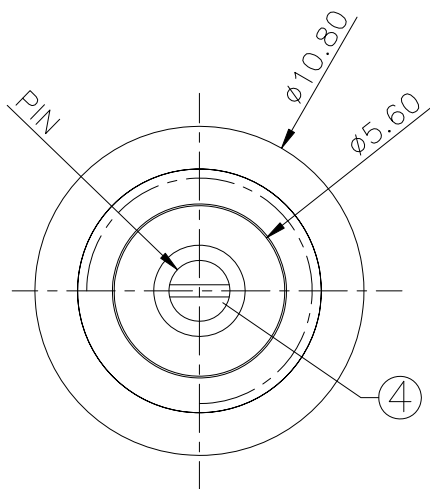

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

Part No.	CDJ-D025M-2.0	CDJ-D025M-2.35	CDJ-D025M-2.5
PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$

6	HOUSING	1	PA66	—	—
5	AXIS SUPPORT	1	BRASS	—	Ni-Plating
4	PIN	1	H59 BRASS	—	Ni-Plating
3	SPRING	1	BRONZE	—	Sn-Plating
2	CURVE PIEVE	1	H62 BRASS	—	Sn-Plating
1	FLAT PIECE	1	H62 BRASS	—	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

DC Power JACK 180°(RoHS)

PART NO:
(料 號) CDJ-D025M-XX

DWG NO(圖號): DJ-D025M

DRAWN(製圖):

mandy

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

. X ± 0.30
. XX ± 0.20

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

更正"Resistance" 單位

DATE

2013.11.08

2014.03.24