

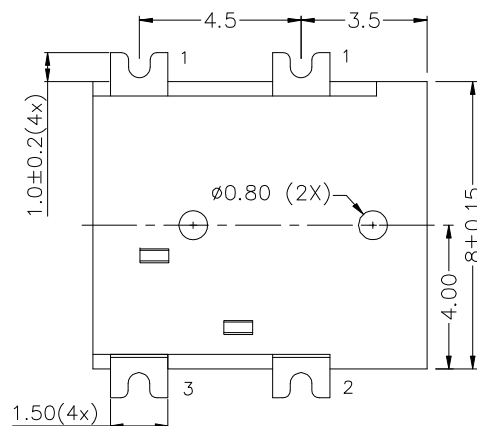
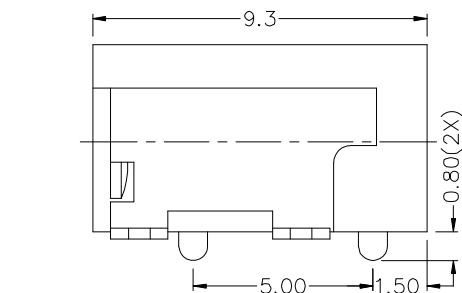
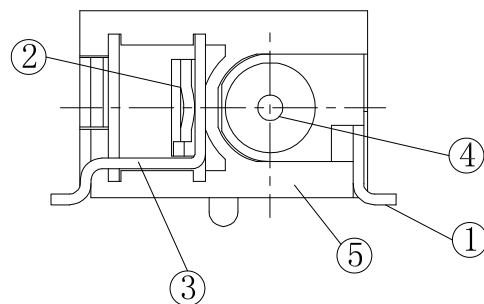


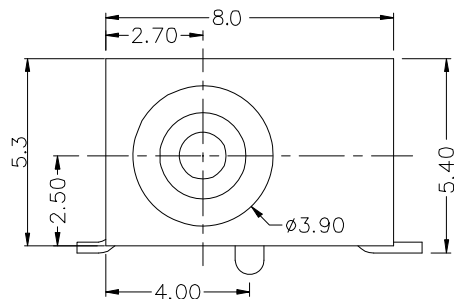

PCB LAYOUT

TOP VIEW

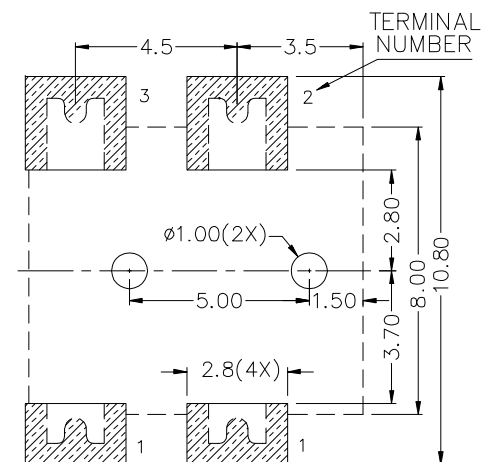

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

PART NO.	PIN	SCHEMATIC
CDJ-S033A-1.0	$\phi 1.0$	
CDJ-S033A-1.3	$\phi 1.3$	

5	HOUSING	1	LCP	BLACK	———
4	PIN	1	BRASS	———	Ni-Plating
3	STATOR	1	BRASS	———	Ag-Plating
2	SPRING	1	BRONZE	———	Ag-Plating
1	CONTACT FOOT	1	BRASS	———	———
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

DESCRIPTION(内容):

DC JACK (9.3) SMT 有柱 (RoHS)

PART NO: (料 號) **CDJ-S033A-XXX**

DWG NO(圖號): **DJ-S033A**

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

. X ± 0.30
. XX ± 0.20

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

圖面更新



圖面更新

DATE


2015.02.03

2016.11.15


2017.07.27





載帶



載帶 (1000pcs/盤)

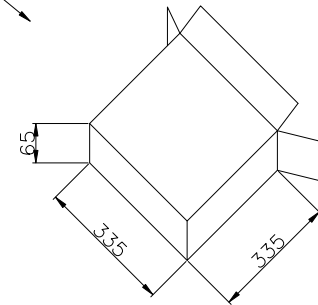

內箱 (2000pcs/盒)

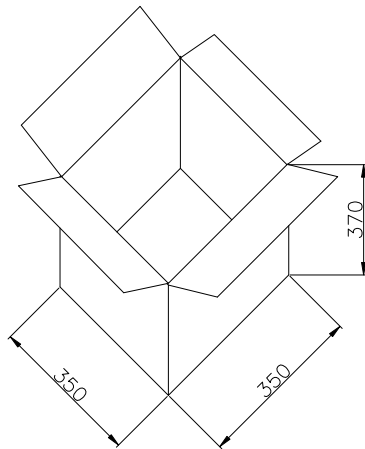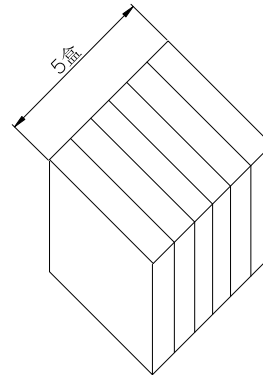

紙箱 (10000pcs)



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

DC JACK (9.3) SMT 有柱
(RoHS)

PART NO:
(料號) CDJ-S033A-XXX

DWG NO(圖號): DJ-S033A

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

±0.30

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

2/2

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2018.11.16