

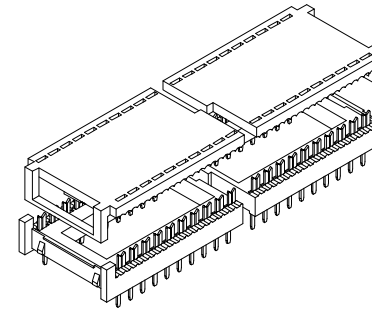

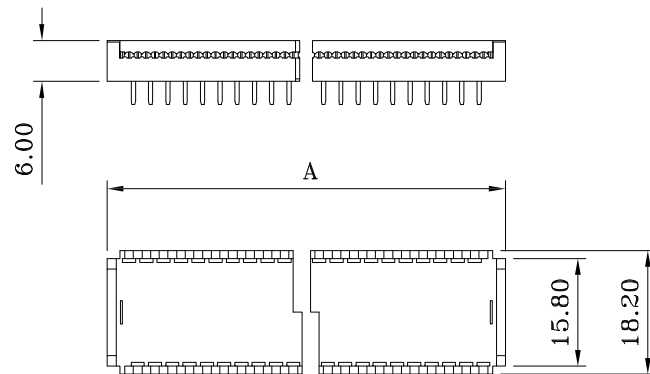
A

B

C

D

E



CONTACTS	A	B
24P	35.88	27.94
28P	40.96	33.02
32P	46.04	38.10
36P	51.12	43.18
40P	56.20	48.26

MATERIALS:

INSULATOR: P.B.T.30%GLASS FIBER,UL94V-0

CONTACT MATERIAL: BRASS,GOLD FLASH OVER NICKEL

ELECTRICAL:

CURRENT RATING: 1AMP DC

INSULATION RESISTANCE: 5000MΩ MIN.



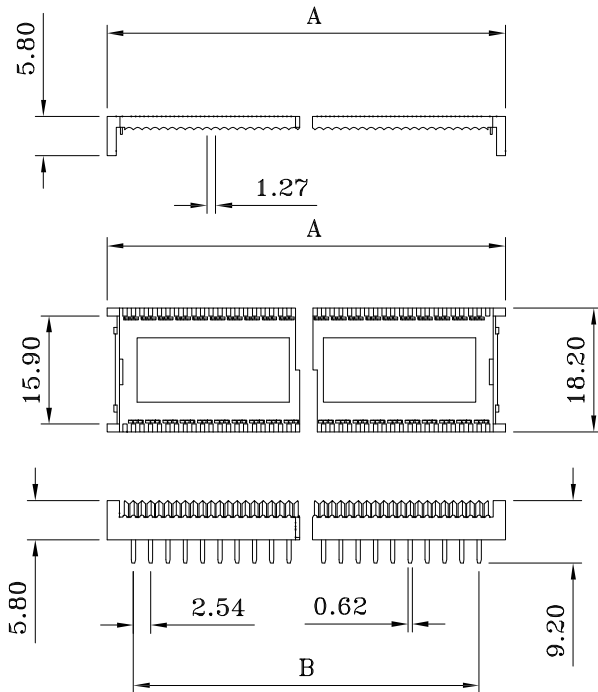
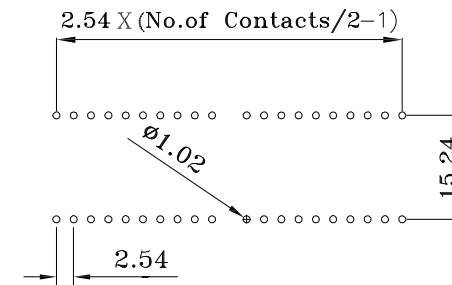
CONTACT RESISTANCE: 30mΩ MAX.

DIELECTRIC WITHSTANDING: 1000V AC

OPERATING TEMPERATURE: -40°C~+105°C

TERMINATED WITH 1.27mm

PITCH FLAT RIBBON CABLE.

Recommended P.C. Board
Hole Layout

DESCRIPTION(內容):

2.54mm DIP PLUG .6" (RoHS)

PART NO:
(料號) CDPLUG060XX

DWG NO(圖號): FD-81-XXB0BKN000C

DRAWN(製圖):

MIMI

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差).X ±0.3
.XX ±0.20

SCALE(比例):

FREE



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

變更環保章字樣

2007年圖面版本更新&變更圖號

圖面更新

DATE

2006.07.05

2006.08.15

2007.07.12

2019.12.25

A

B

C

D

E