

A

B

C

D

E

SPECIFICATIONS

Electrical

Current Rating: 2.5A AC, DC

Voltage Rating: 250V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 800V AC/ min.



Contact Resistance: 10m Ω / max.

Material



Terminal Material: Brass, Copper-Undercoated,/

Tin-Lead plated

Material: Nylon 66, UL94V-0

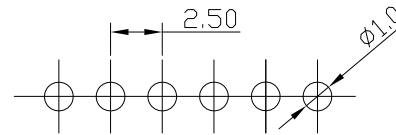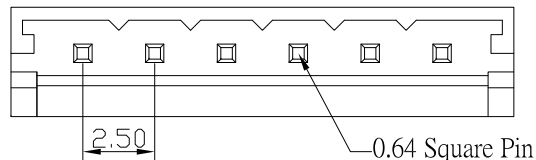

RECOMMENDED P.C.BOARD HOLE DIMM.

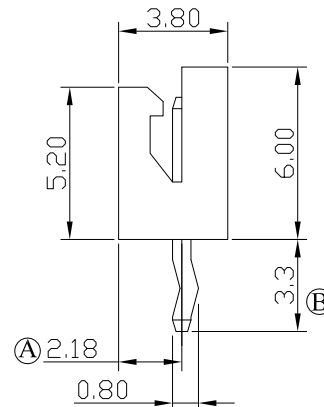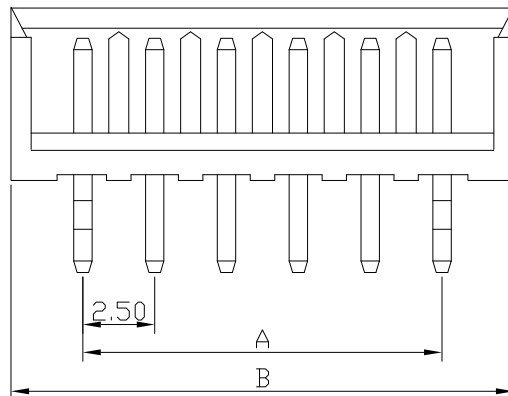

Poles	Dimension mm (in.)		Part No.
	A	B	
2	2.50 (0.098)	7.50 (0.295)	CE-W250-2
3	5.00 (0.197)	10.00 (0.394)	CE-W250-3
4	7.50 (0.295)	12.50 (0.492)	CE-W250-4
5	10.00 (0.394)	15.00 (0.591)	CE-W250-5
6	12.50 (0.492)	17.50 (0.689)	CE-W250-6
7	15.00 (0.591)	20.00 (0.787)	CE-W250-7
8	17.50 (0.689)	22.50 (0.886)	CE-W250-8
9	20.00 (0.787)	25.00 (0.984)	CE-W250-9
10	22.50 (0.886)	27.50 (1.802)	CE-W250-10
11	25.00 (0.984)	30.00 (1.181)	CE-W250-11
12	27.50 (1.802)	32.50 (1.280)	CE-W250-12
13	30.00 (1.181)	35.00 (1.378)	CE-W250-13
14	32.50 (1.280)	37.50 (1.476)	CE-W250-14
15	35.00 (1.378)	40.00 (1.575)	CE-W250-15



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

2.5mm Wire-to-Board Header
DIP 180° Type (RoHS)

PART NO:
(料 號) CE-W250-XX

DWG NO(圖號): 2501H-XX-ST

DRAWN(製圖):

mimi

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

X.XX $\pm$ 0.2
X.X $\pm$ 0.3

SCALE(比例):

FREE



REV:
R3

UNIT:
mm

SIZE:

A4

SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

補充(A)尺寸

變更(B)尺寸 (3.2→3.3)

更換確認章

DATE

2006.09.14

2008.02.20

2010.04.21

2019.09.02

A

B

C

D

E

CF091