

A

B

C

D

E

SPECIFICATIONS

Electrical

Current Rating: 2.5A AC, DC

Voltage Rating: 250V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 800V AC/ min.



Contact Resistance: 10m Ω / max.

Material



Terminal Material: Brass, Copper-Undercoated,/

Tin-Lead plated

Material: Nylon 66, UL94V-0

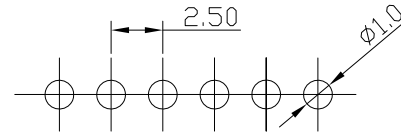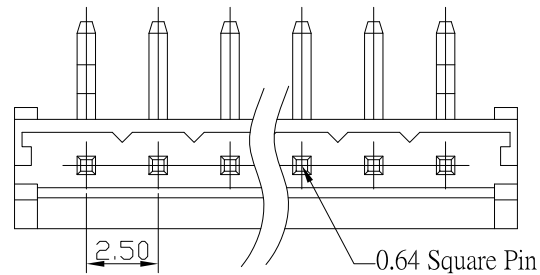

RECOMMENDED P.C.BOARD HOLE DIMM.

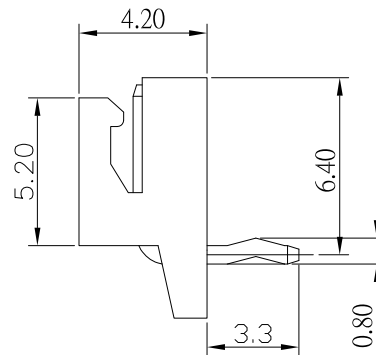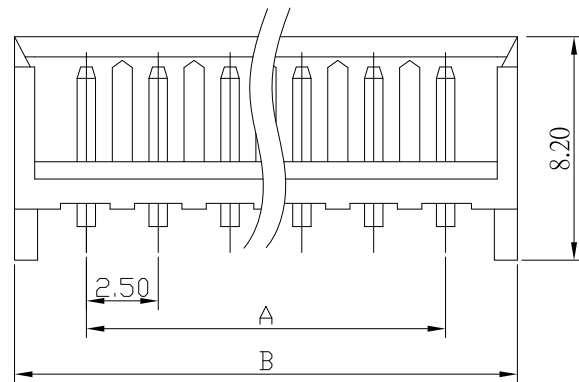

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	2.50 (0.098)	7.50 (0.295)	CE-W250R-2	
3	5.00 (0.197)	10.00 (0.394)	CE-W250R-3	
4	7.50 (0.295)	12.50 (0.492)	CE-W250R-4	
5	10.00 (0.394)	15.00 (0.591)	CE-W250R-5	
6	12.50 (0.492)	17.50 (0.689)	CE-W250R-6	
7	15.00 (0.591)	20.00 (0.787)	CE-W250R-7	
8	17.50 (0.689)	22.50 (0.886)	CE-W250R-8	
9	20.00 (0.787)	25.00 (0.984)	CE-W250R-9	
10	22.50 (0.886)	27.50 (1.02)	CE-W250R-10	
11	25.00 (0.984)	30.00 (1.181)	CE-W250R-11	
12	27.50 (1.02)	32.50 (1.280)	CE-W250R-12	
13	30.00 (1.181)	35.00 (1.378)	CE-W250R-13	
14	32.50 (1.280)	37.50 (1.476)	CE-W250R-14	
15	35.00 (1.378)	40.00 (1.575)	CE-W250R-15	



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(内容):

2.5mm Wire-to-Board Header
DIP 90° Type (RoHS)

PART NO:
(料 號) CE-W250R-XX

DWG NO(圖號): 2501H-XX-RT

DRAWN(製圖):

Gary

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X.XX $\pm$ 0.2
X.X $\pm$ 0.3

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

更換確認章

DATE

2006.09.14

2019.09.02

A

B

C

D

E

CF091