
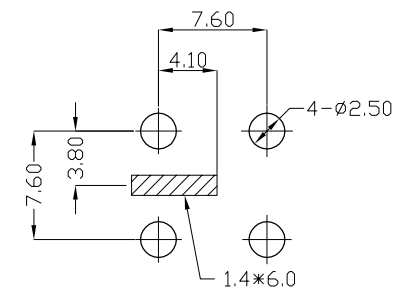
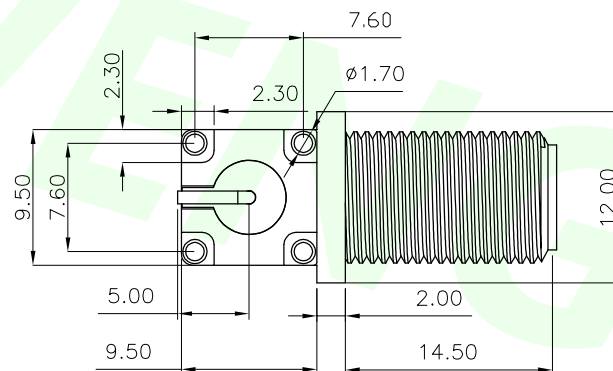
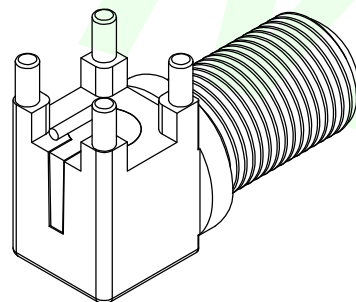
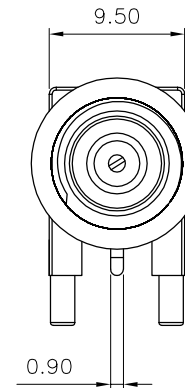
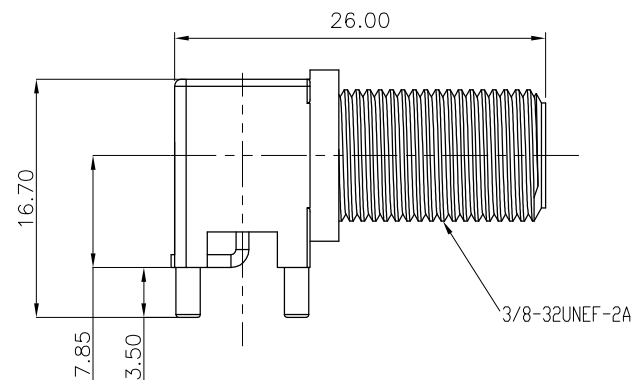


所有材料為
"環保材料"
2013.11.08
RoHS

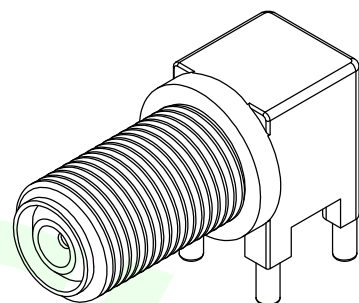

RECOMMENDED PCB LAYOUT
TOLERANCE: $\pm 0.05\text{mm}$

SPECLFICATION ELECTRICAL

Impedance: 75 ohm Operation voltage: 250 vac max
Frequency Range: 2GHz Insulation resistance: 1000Mchms min
VSWR: 1.35 max Part no.

6	INNER INSULATOR	1	PP	—	N/A
5	OUTTER INSULATOR	1	PA66	—	N/A
4	BOTTOR PLUG	1	POM	—	N/A
3	BODY	1	ZINC ALLOY	—	N/A
2	CONTACT	1	BRASS	—	Ni-Plating
1	SOLDER TAILS	1	BRONZE	—	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK