




Note:

Plastic material:PBT+G/F,UL 94V-0.
 Contacts copper alloy.
 Plating:Gold Flash over Nickel.
 External must be non-damage
 Operating temperature:-20°C~85°C
 Current Rating:1 Amp.
 Insulation resistance:1000MΩ Min.
 Dielectric voltage:300V AC for 1 minute.

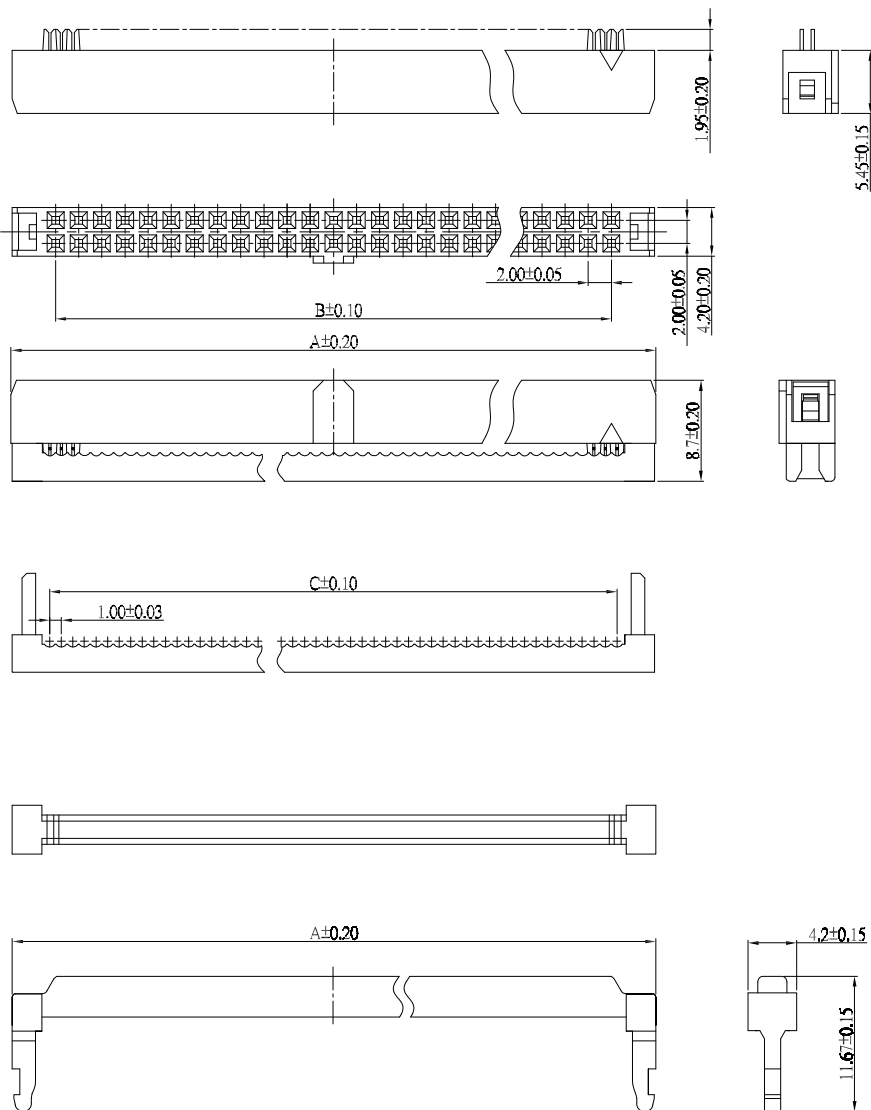

PIN數	尺寸		
	A	B	C
6	11.25	4.00	5.00
8	13.25	6.00	7.00
10	15.50	8.00	9.00
12	17.40	10.00	11.00
14	19.40	12.00	13.00
16	21.30	14.00	15.00
20	25.40	18.00	19.00
22	27.60	20.00	21.00
24	29.60	22.00	23.00
26	31.60	24.00	25.00
30	35.60	28.00	29.00
34	39.60	32.00	33.00
36	41.60	34.00	35.00
40	45.60	38.00	39.00
44	49.60	42.00	43.00
50	55.75	48.00	49.00