

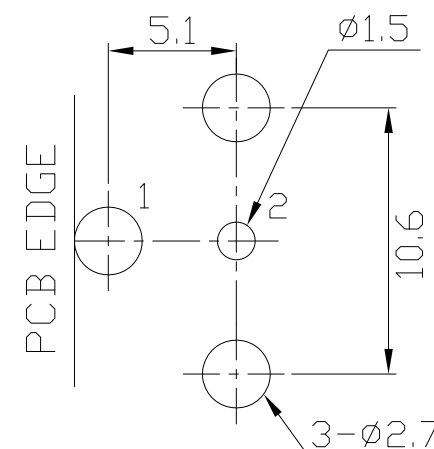


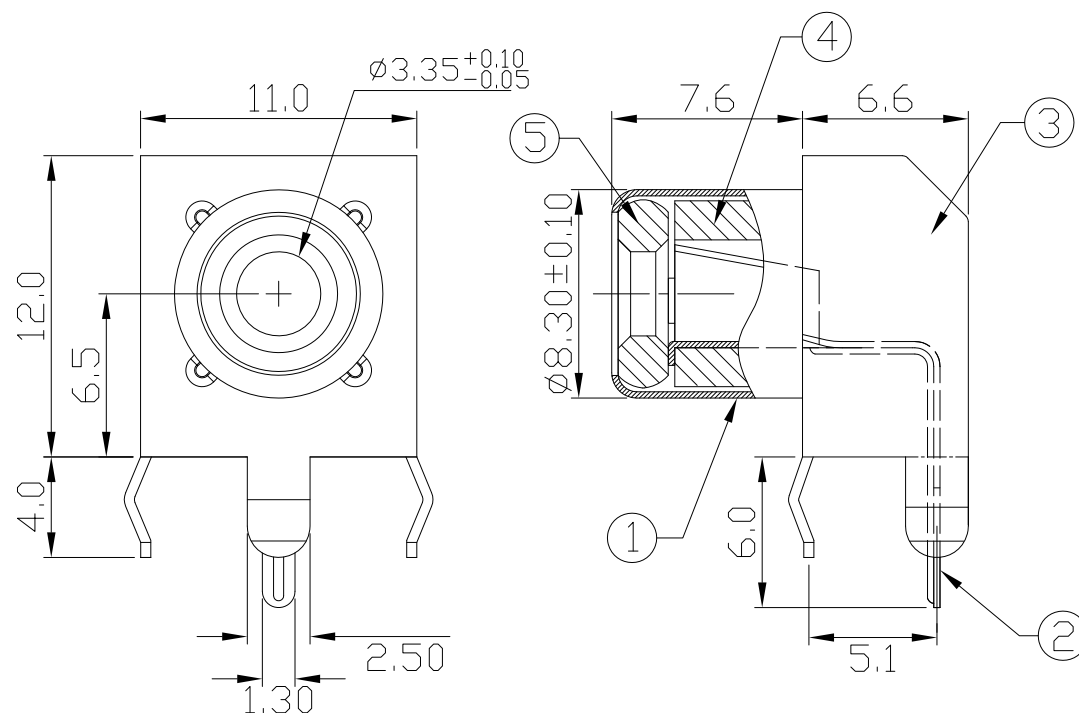

PCB LAYOUT
(BOTTOM VIEW)



Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.

Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.

Durability (Life Test): 4000 Cycles.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0 Kg.

COLOR	PART NO.
RED	CKY-006-1R-L
YELLOW	CKY-006-1Y-L
WHITE	CKY-006-1W-L
BLACK	CKY-006-1B-L
BLUE	CKY-006-1BL-L
GREEN	CKY-006-1GR-L

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	C.R.S T:0.3	TIN-PLATED	1
2	TERMINAL	BRASS T:0.25	TIN-PLATED	1
3	BRACKET	C.R.S T:0.4	TIN-PLATED	1
4	INSULATOR	PBT G.F.	WHITE	1
5	RING	PBT G.F.		1

DESCRIPTION(内容):

RCA JACK (RoHS)

PART NO:
(料 號) CKY-006-1 _L

DWG NO(圖號): KY-006-1-L

DRAWN(製圖):

mimi

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差) X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

SCALE(比例):

FREE

REV:

R4

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R1

R2

R3

R4

DESCRIPTION

變更環保章字樣

變更為系列(Color)圖面

2008圖面版本更新

更換確認章

DATE

2006.08.16

2007.02.12

2008.11.18

2019.07.30