




SPECIFICATIONS

Current rating	:5A AC, DC
Voltage rating	:250V AC, DC
Temperature range	: -25° C ~ +105° C
Contact resistance	:10m OHM Max
Insulation resistance	:1000M OHM Min
Withstanding voltage	:1500 VAC/minute
Finished	:Brass/Tin-plated
Housing Material	:LCP, UL94V-0
Color	:Black

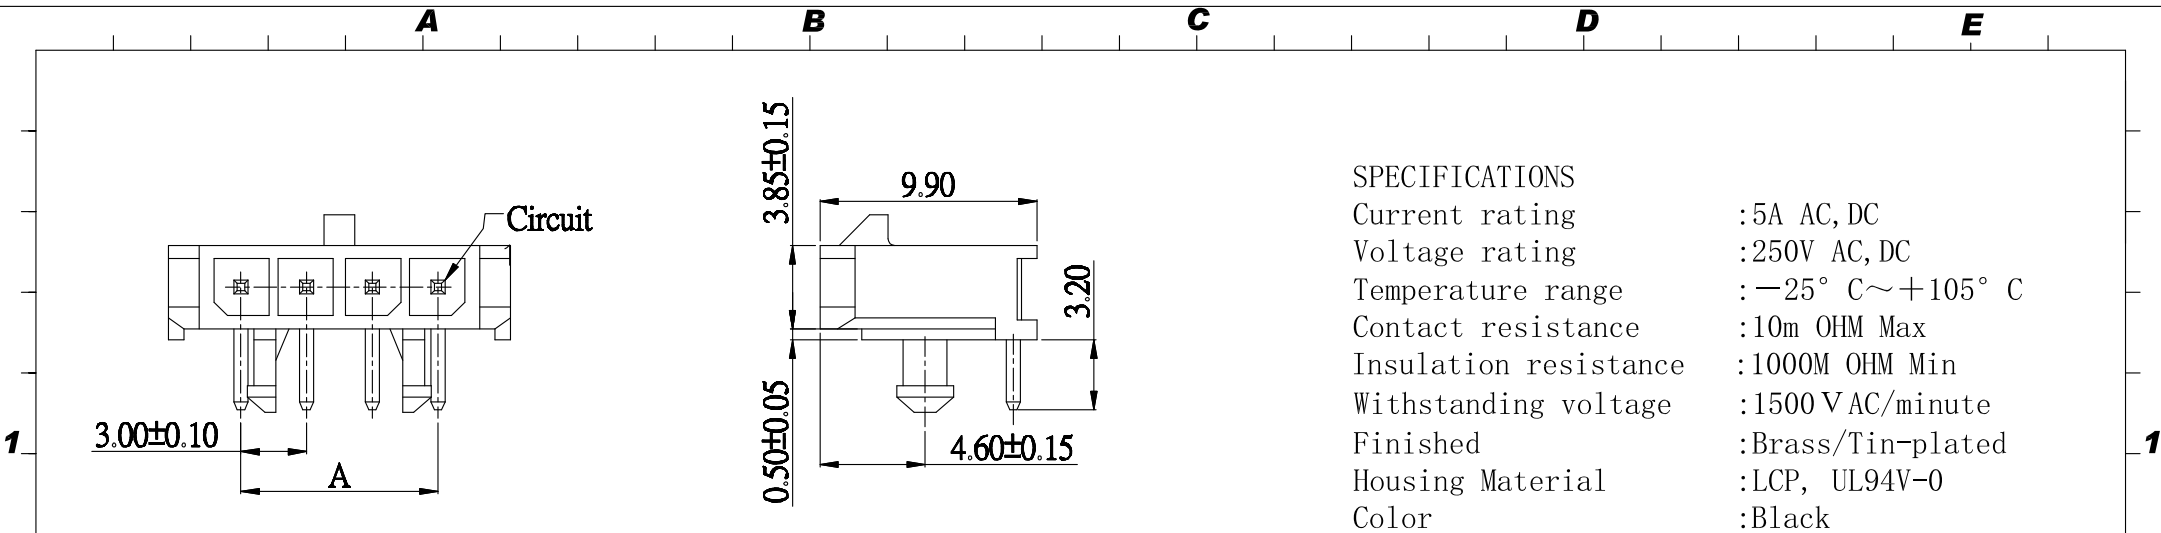

Part No.	Dimensions		
	A	B	C
CMF-W300R-1X01C-CF438	----	6.65	----
CMF-W300R-1X02C-CF438	3.00	9.65	----
CMF-W300R-1X03C-CF438	6.00	12.65	----
CMF-W300R-1X04C-CF438	9.00	15.65	4.70
CMF-W300R-1X05C-CF438	12.00	18.65	7.70
CMF-W300R-1X06C-CF438	15.00	21.65	10.70
CMF-W300R-1X07C-CF438	18.00	24.65	13.70
CMF-W300R-1X08C-CF438	21.00	27.65	16.70
CMF-W300R-1X09C-CF438	24.00	30.65	19.70
CMF-W300R-1X10C-CF438	27.00	33.65	22.70
CMF-W300R-1X11C-CF438	30.00	36.65	25.70
CMF-W300R-1X12C-CF438	33.00	39.65	28.70



DESCRIPTION(内容): MX3.00mm Micro-Fit S/R 90° DIP (RoHS) PART NO: (料 號) CMF-W300R-1xXXC-CF438 DWG NO(圖號):	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差) .X ±0.50 .XX ±0.25 .XXX ±0.10	REV: A/1	REV	DESCRIPTION	DATE 2017.07.27
	CHECKED(確認): 黃炳秋		UNIT: mm			
	APPROVAL(核准): 鄧文廣	SCALE(比例): 1:XX	SIZE: A4	3		
			SHEET: 1/2	4		