

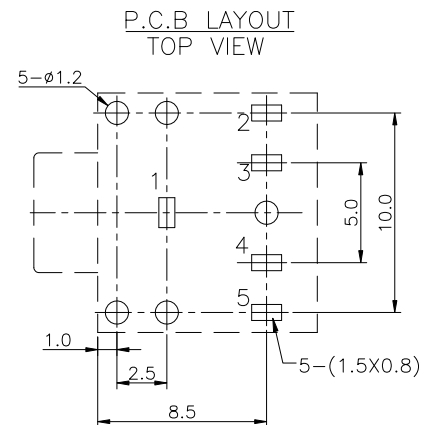
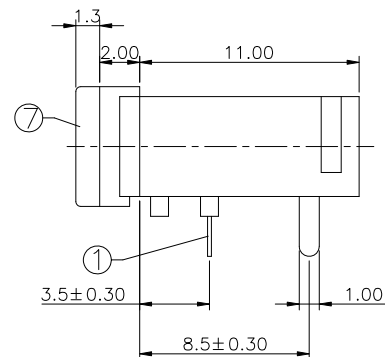
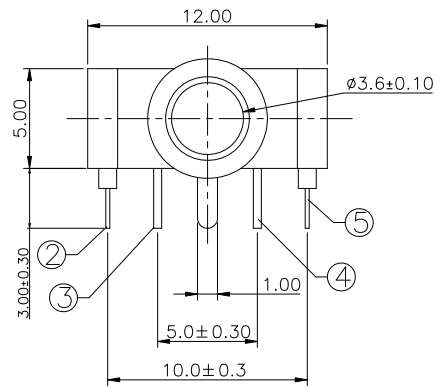
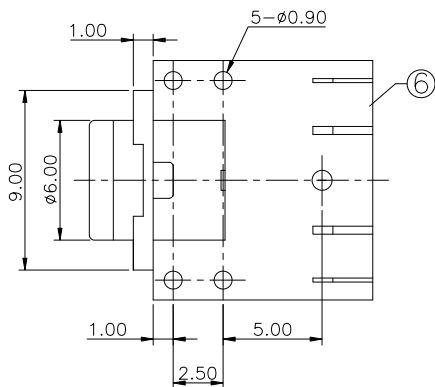




SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N ;
- 6.life test : 5,000 cycles °



PART NO.:

CPJ-D3007-X-1.3

SEE SCHEMATIC

SCHEMATIC

CPJ-D3007-1.3	CPJ-D3007-1-1.3	CPJ-D3007-2-1.3	CPJ-D3007-3-1.3	CPJ-D3007-4-1.3	CPJ-D3007-5-1.3

7	HOUSING	1	BRASS	Ni-Plating
6	AXIS SUPPORT	1	PBT	—
5	5# CONTACT FOOT	1	BRONZE	Sn-Plating
4	4# CONTACT FOOT	1	BRASS	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	BRONZE	Sn-Plating
1	1# CONTACT FOOT	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

DESCRIPTION(内容):

PHONE JACK

PART NO:
(料 號) CPJ-D3007-X-1.3

DWG NO(圖號): PJ-D3007

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:(公差)

X.X ±0.30
X.XX ±0.20

SCALE(比例):

FREE

REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

圖面更新、料號變更(原:CPJ-D3007-X-)

DATE

2013.11.07

2019.01.29