


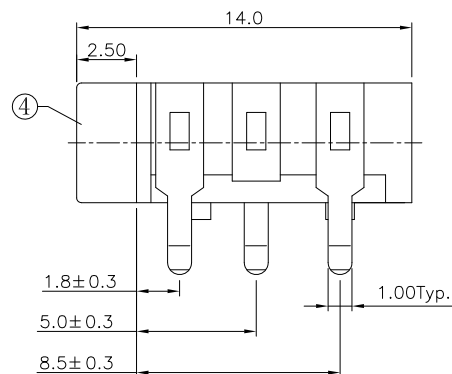
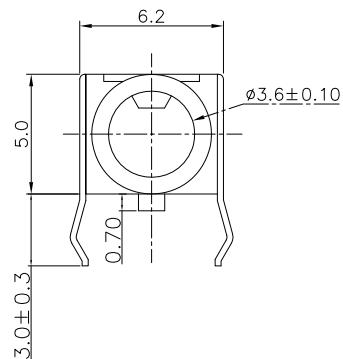
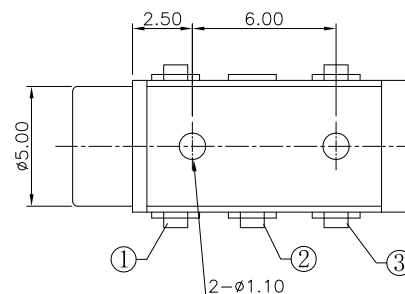





- SPECIFICATION
1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-30N;
 6. Life test: 5,000 cycles.



P. C. B LAYOUT
TOP VIEW

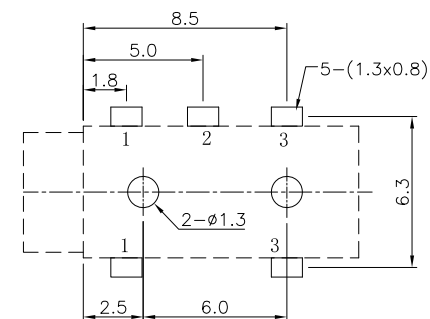

SCHEMATIC



4	HOUSING	1	PBT	—	—
3	CONTACT FOOT	1	SUS301	—	Sn-Plating
2	CONTACT FOOT	1	SUS301	—	Sn-Plating
1	CONTACT FOOT	1	SUS301	—	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

