
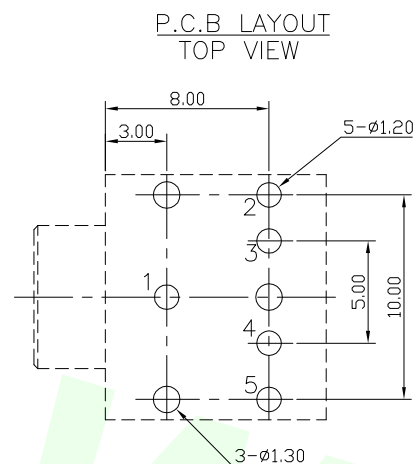
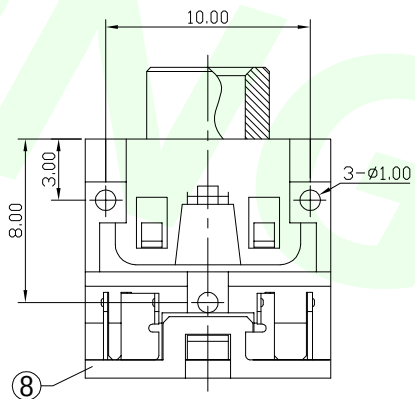
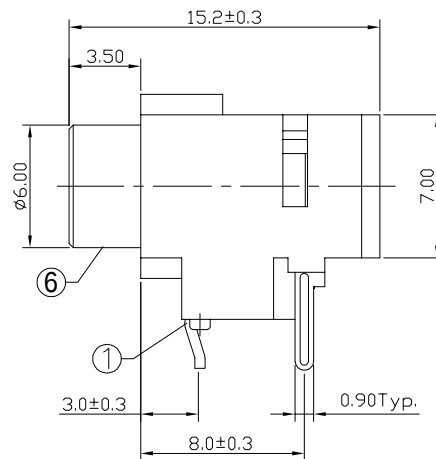




RoHS

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3—30N;
6. life test: 5,000 cycles.

8	COVER	1	PBT	_____	_____
7	HOUSING	1	PBT	_____	_____
6	AXIS SUPPORT	1	BRASS	_____	Ni-Plating
5	SPRING PIECE	1	SUS301	_____	Ag-Plating
4	CONTACT FOOT	1	SUS301	_____	Ag-Plating
3	CONTACT FOOT	1	BRASS	_____	Ag-Plating
2	SPRING PIECE	1	SUS301	_____	Ag-Plating
1	CONTACT FOOT	1	BRASS	_____	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

承洧科技股份有限公司
Cherng Weei Technology Corp.

CF1165