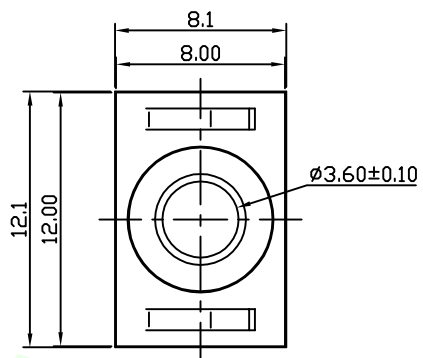



SCHEMATIC



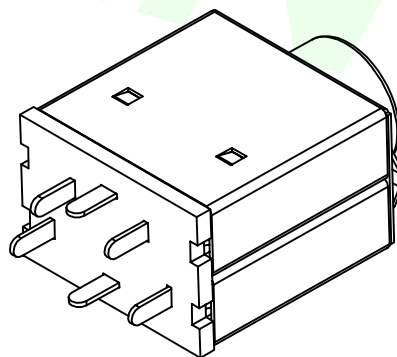
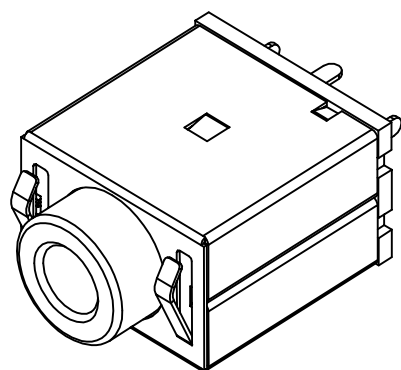
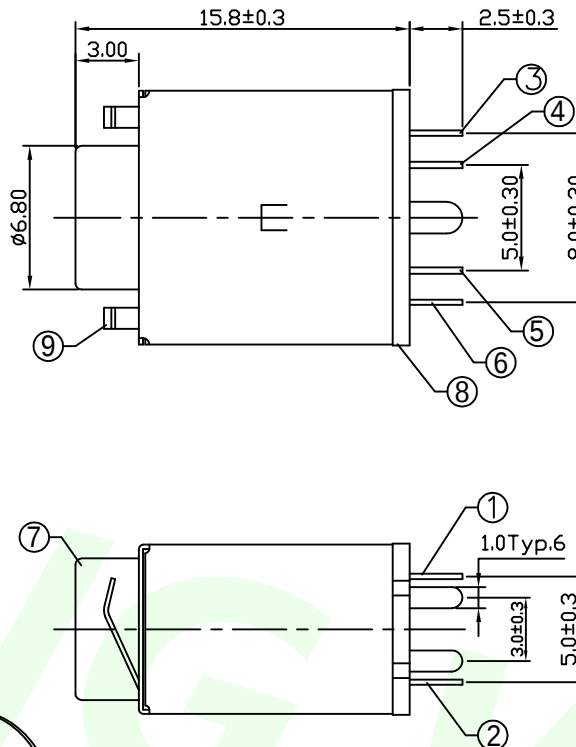
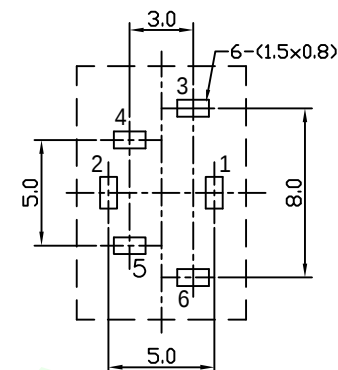
SPECIFICATION

- Rating : DC 30V 0.5A;
- Contact resistance: $\leq 0.03\Omega$;
- Insulation resistance: $\geq 100M\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- life test: 5,000 cycles.

所有材料為
"環保材料"

2013.11.07

RoHS

P.C.B LAYOUT
TOP VIEW

9	COAT	1	SUS301		
8	COVER	1	PA9T		
7	HOUSING	1	PA66		
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE		Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE		Ag-Plating
4	4# CONTACT FOOT	1	BRASS		Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE		Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE		Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE		Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK



承洧科技股份有限公司
Cherung Weei Technology Corp.

DESCRIPTION(內容):

PHONE JACK

PART NO: CPJ-D3096-X
DWG NO(圖號): PJ-D3096

DRAWN(製圖):

MIMI

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

X ± 0.50 Angle

X.X ± 0.30 X '± 3'

X.XX ± 0.20 X.X '± 2'

X.XXX ± 0.10 X.XX '± 1'

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

DATE

2013.11.07